


THE ULTIMATE IN FOOD HOLDING



EXTEND YOUR FOOD HEAT ZONE WITH



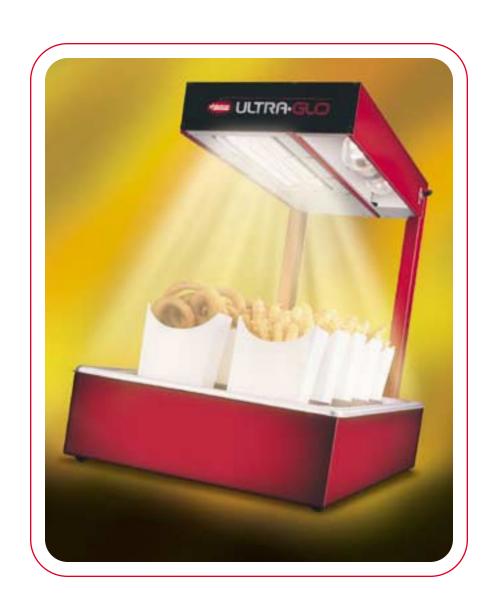




The Ultimate in Safety and Quality

Ensure maximum flavor, safety, and holding time with the ultimate food holding power -Ultra-Glo[™] Ceramic Infrared Foodwarmers. The increased height of this heat source improves operational working clearances, giving the chef and server an improved ergonomic environment in which to work. The food heat zone blankets the entire food holding area, eliminating cold spots. Plus the risk of food-borne illnesses is minimized. These ceramic warmers produce an extremely even amount of heat that does not dry out the food product, helping to retain the internal moisture, thereby improving holding times. Cool-touch wire guards over the emitters help prevent incidental contact. Ultra-Glo models come with

a clear anodized finish and are available in optional glossy translucent colors.

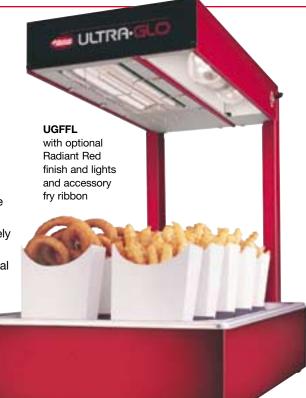



Haten ULTRA-GLO








The Ultimate Heat Zone

Ultra-Glo's prefocused heat pattern provides an increased pyramidal dimension, enveloping the food holding area not just side-to-side, but front-to-back. Heat is concentrated at the edges where heat loss is the greatest. Foods are held at optimum serving temperatures longer without continuing to cook the food.

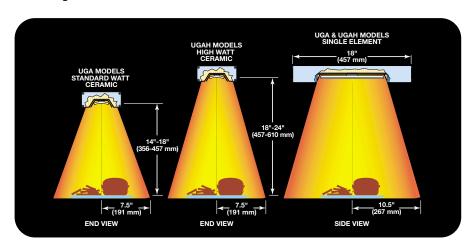

From Ultra-Glo to Glo-Ray® to Infra-Black® only Hatco offers a warming combinations than anyone in the industry, it's easy to


THE HOTTEST HOLDING TECHNOLOGY!





ULTRA-GLO[™] CERAMIC INFRARED FOODWARMERS

Models UGFF, UGFFB, UGFFBL UGAH-18, -24, -30, -36, -42, -48, -54, -60, -66, -72, -18D, -24D, -30D, -36D, -42D, -48D, -54D, -60D, -66D, -72D UGA-18, -24, -30, -36, -42, -48, -54, -60, -66, -72, -18D, -24D, -30D, -36D, -42D, -48D, -54D, -60D, -66D, -72D



SPECIFICATIONS

Model	Watts	Amps	Shipping Weight
UGFF	750	4.2	16 lbs. (7 kg)
UGFFL*	870	5.2	18 lbs. (8 kg)
UGFFB	1000	6.3	26 lbs. (12 kg)
UGFFBL*	1120	7.3	31 lbs. (14 kg)

* "L" added to model number indicates incandescent light.

DIMENSIONS

UGFF: 12³/8"W x 22¹/4"D x 18⁷/8"H (314 x 565 x 479 mm). UGFFB: 12"W x 22"D x 22"H (305 x 559 x 559 mm).

VOLTAGE

120 volts, single phase (uses NEMA 5-15P).

CORD LOCATION

UGFF, UGFFL: Back of unit at top. UGFFB, UGFFBL: Bottom back.

PLUG CONFIGURATIONS




OPTIONS (NOT FOR RETROFIT)

☐ Translucent Gloss Finishes: Radiant Red, Gleaming Gold, Classic Chrome, Brilliant Blue, Bold Black

ACCESSORIES

- □ 5 Pleat Hardcoated Fry Box Ribbon
- 8 Pleat Hardcoated Fry Bag Ribbon
- □ Food Holding Pans
- □ Wire Trivet



Single Models

2½" (64 mm) -18" thru 72" (457-1829 mm) ___ 15" or 18" ___ (381 or 1168 mm) FRONT VIEW **END VIEW**

Dual Models

SPECIFICATIONS

Single Models

Aluminum Hig	gh Watt	Aluminum Standard Watt			
Model	Watt*	Model	Watt*	Width	Shipping Weight
UGAH-18	675	UGA-18	490	18" (457 mm)	9 lbs. (4 kg)
UGAH-24	750	UGA-24	675	24" (610 mm)	10 lbs. (5 kg)
UGAH-30	1125	UGA-30	750	30" (762 mm)	11 lbs. (5 kg)
UGAH-36	1350	UGA-36	980	36" (914 mm)	12 lbs. (5 kg)
UGAH-42	1500	UGA-42	1120	42" (1067 mm)	13 lbs. (6 kg)
UGAH-48	2025	UGA-48	1470	48" (1219 mm)	14 lbs. (6 kg)
UGAH-54	2250	UGA-54	1470	54" (1372 mm)	16 lbs. (7 kg)
UGAH-60	2700	UGA-60	1960	60" (1524 mm)	17 lbs. (8 kg)
UGAH-66	2700	UGA-66	1960	66" (1676 mm)	19 lbs. (9 kg)
UGAH-72	3000	UGA-72	1960	72" (1829 mm)	20 lbs. (9 kg)

Dual Models

Aluminum Hig	gh Watt	Aluminum Standard Watt			
Model	Watt*	Model	Watt*	Width	Shipping Weight
UGAH-18D	1350	UGA-18D	980	18" (457 mm)	17 lbs. (8 kg)
UGAH-24D	1500	UGA-24D	1350	24" (610 mm)	19 lbs. (9 kg)
UGAH-30D	2250	UGA-30D	1500	30" (762 mm)	21 lbs. (10 kg)
UGAH-36D	2700	UGA-36D	1960	36" (914 mm)	24 lbs. (11 kg)
UGAH-42D	3000	UGA-42D	2240	42" (1067 mm)	27 lbs. (12 kg)
UGAH-48D	4050	UGA-48D	2940	48" (1219 mm)	30 lbs. (14 kg)
UGAH-54D	4500	UGA-54D	2940	54" (1372 mm)	33 lbs. (15 kg)
UGAH-60D	5400	UGA-60D	3920	60" (1524 mm)	37 lbs. (17 kg)
UGAH-66D	5400	UGA-66D	3920	66" (1676 mm)	40 lbs. (18 kg)
UGAH-72D	6000	UGA-72D	3920	72" (1829 mm)	44 lbs. (20 kg)

^{*} Based on 208 volts.

DIMENSIONS

Single Models: 18"-72"W x 6"D* x 21/2"H (457-1829 x 152 x 64 mm). Dual Models: 18"-72"W x 15" or 18"D x 21/2"H

(457-1829 x 381 or 457 x 64 mm).

Attached Control Enclosure: 11" or 14"W x 37/8"D x 21/2"H (279 or 356 x 98 x 64 mm).

Remote Control Box: 11" or 14"W x 3"D x 21/2"H (279 or 356 x 76 x 64 mm).

* Add 3" (76 cm) to depth when ordering single model units with lights.

120, 208 and 240 volts, single phase.

Models with Lights: 120, 120/208 and 120/240, single phase.

ULTRA-GLO WARMERS MUST BE MOUNTED AT LEAST 11/2" (38 mm) BELOW SHELF.







OPTIONS (NOT FOR RETROFIT)

- ☐ Translucent Gloss Finishes: Radiant Red, Gleaming Gold, Classic Chrome, Brilliant Blue, Bold Black
- ☐ Remote Control Box

- ☐ Incandescent Lights (Adds 3" (76 mm) to depth of single UGAH and UGA models)
- ☐ Non-Adjustable Tubular Stands 14"-24" (356-610 mm)

HATCO CORPORATION P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. • (800) 558-0607 • (414) 671-6350 Fax (800) 543-7521 • Int'l. Fax (414) 671-3976 • Web Site: www.hatcocorp.com • E-mail: equipsales@hatcocorp.com