



# WM600 & WM600C Water Meter

## FEATURES

- Convenient & labor saving
- Microcomputer controlled, to deliver a specific amount of water at a specific temperature once the water temperature is reached.
- Digital control panel
- Delivery can be interrupted, the amount set changed (above the quantity already dispensed) and delivery resumed without reprogramming.
- Rear mounted temperature probe with 6' tether
- Water meter remembers last setting during black-out or accidental disconnection from power.
- Stainless steel casing provides protection for precision components.
- May also be used with external water chiller. Chiller is not included with unit. Consult factory for details.
- Use in English or Metric measures
- Stainless steel hook on dispensing hose will hang on a standard mixing bowl or sink.



## OPTIONS & ACCESSORIES

- WM600:** 120V/1 ph/50-60Hz/1 amp
- WM600C:** 220-250V/1 ph/50-60Hz/1 amp
- Side mounted temperature probe
- Front mounted dispensing hose



Area Reserved For Consultant & Contractor Approvals



19220 State Route 162 East  
Orting, WA 98360  
www.baxtermfg.com

**Factory**  
(360) 893-5554


**Customer Care**  
(800) 777-2828  
or  
(800) 333-7447

**Customer Care Fax**  
(937) 332-2852



## WM600 & WM600C Water Meter

### Suggested Water Meter Location

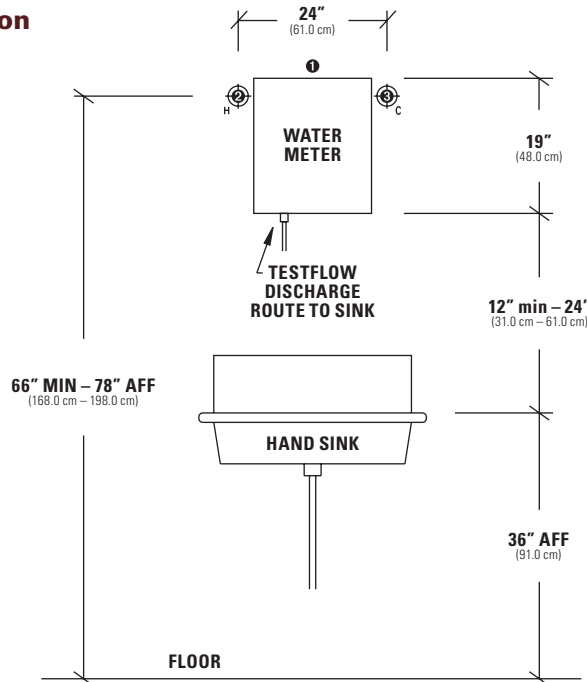

### SPECIFICATIONS

**Temperature Range:** 32°F-125°F (0°C-52°C)

**Weight Range:** Up to 1,000 pounds (462 liters)

**Accessory Switch:** 7 amp, 1/6 HP. Automatically activates water chiller pump when delivering. Water chiller is not included with this unit and must be ordered separately.

**Flow:** More than 30 lbs./min. @ 40 psi inlet pressure.

**Delivery Accuracy:** ±1.5% @ 30 psi inlet pressure (above 6 lb. delivery).

**Temperature Accuracy:** ±2°F (1°C)

**Temperature Adjustment Time:** Normally less than 30 seconds for any set temperature. Maximum temperature adjustment time 120 seconds.

Wall Mount bracket and hardware are included. Meter lifts off the bracket leaving your wall mount hardware intact.

**Dimensions:** 13.5"W x 7.5"D x 19"H

**Weight:** 52 lbs. (23.6 kg)

**Freight Class 65**

### UTILITIES

**❶ Power:**

- **WM600:** 120V/50-60/1 1amp
- **WM600C:** 220-250V/50-60/1 amps

**❷ Water – Hot:** 140°F (60°C) max., 1/2" NPTF, 30-100 psi

**❸ Water – Cold:** 32°F (0°C) min., 1/2" NPTF, 30-100 psi

**Input Supply Lines:** contain cross-flow preventers, pressure regulators, gauges and strainers. A disconnect joint is provided at the meter.

**Output Hose:** consists of NSF approved 8' long flexible hose and stainless steel tube "hook" for hanging on your mixer bowl or sink. (An approved siphon breaker is installed at the meter-end of the hose.)

Manufacturer reserves the right to make changes in sizes and specifications.



19220 State Route 162 East  
Orting, WA 98360  
www.baxtermfg.com

**Factory**  
(360) 893-5554

**Customer Care**  
(800) 777-2828  
or  
(800) 333-7447

**Customer Care Fax**  
(937) 332-2852