

P A C K A G I N G

Berkel**350 SERIES**
VACUUM PACKAGE MACHINES

Model 350

**FEATURES**

Berkel Models 350 and 350D are reliable tabletop vacuum package machines designed to meet most mid- to high-volume foodservice portion control, product storage and food retail needs. The units offer a spacious stainless steel chamber, powerful, high quality pump and single 17" (double on 350D) seal bar providing a high integrity double seal with electric cut-off. Both models offer an anaerobic gas flush to maintain product color in the vacuum package, extend shelf life and/or to provide a pillow-pack seal to protect the product. The units are simple to operate and maintain.

- 350** One 17" seal bar
- 350D** Two 17" seal bars

STANDARD FEATURES

- Tabletop models with a stainless steel housing and single 18" (457 mm) x 18" (457 mm) x 6½" (165 mm) chamber.
- Model 350 includes a single 17" (425 mm) seal bar; Model 350D includes two 17" (425 mm) seal bars; provide high integrity double sealing with electric cut-off.
- Powerful, high quality 21 m³/h Busch pump and vacuum dial gauge.
- 1-speed, ¼ H.P. motor, totally enclosed, permanently lubricated ball bearings, thermally protected.
- Model 350 furnished in 115/60/1, 14.2 amp, AC, ETL listed; Model 350D furnished in 115/60/1, 20.0 amp, AC, ETL listed.
- Vacuum intervals of 1 to 99 seconds.
- Gas flush for the addition of an anaerobic gas mixture and/or pillow-pack seal.
- Simple to operate electronic, touch pad controls with nine storable programs.
- Attached 6-foot, flexible, 3-wire cord and plug for grounded receptacle.

OPTIONS

- Liquid control system

Berkel

a division of ITW Food Equipment Group LLC



350 SERIES VACUUM PACKAGE MACHINES

SPECIFICATIONS

Finish/Construction: Tabletop models with stainless steel housing and single chamber.

Pump: Powerful, high quality 21 m³/h Busch pump and vacuum dial gauge.

Electrical: Model 350 furnished in 115/60/1, 14.2 amp, AC, ETL listed. Model 350D furnished in 115/60/1, 20 amp, AC, ETL listed.

Vacuum Chamber: Single, stainless steel 18" (457 mm) x 18" (457 mm) x 6½" (165 mm) chamber. Vacuum intervals of 1 to 99 seconds.

Seal Bar(s): Model 350 includes a single 17" (432 mm) seal bar; Model 350D includes two, 17" (432 mm) seal bars; provide high integrity double sealing with electric cut-off.


Gas Flush: Provides for the addition of an anaerobic gas mixture and/or pillow-pack seal.

Controls: Simple to operate electronic, touch pad controls with nine storable programs.

Motor: 1-speed, 1¼ HP, totally enclosed, permanently lubricated ball bearings, thermally protected.

Cord and Plug: Attached 6-foot, flexible, 3-wire cord and plug for grounded receptacle.

Warranty: All parts, service and travel coverage for one year, excluding wear items.

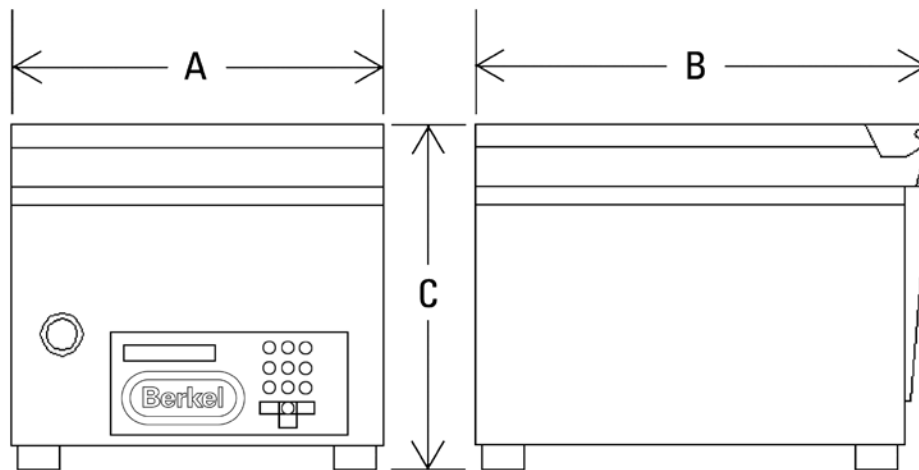

| MODEL NUMBER | CHAMBER SIZE | | | SEAL BAR | SEAL BAR LENGTH | PRODUCT DIMENSIONS | | |
|--------------|-----------------|-----------------|-----------------|----------|-----------------|--------------------|-----------------|------------------|
| | WIDTH | DEPTH | HEIGHT | | | WIDTH A | DEPTH B | HEIGHT C |
| 350 | 18" (457 mm) | 18" (457 mm) | 6½" (165 mm) | 1 | 17" (432 mm) | 21" (533 mm) | 24" (610 mm) | 20½" (445 mm) |
| 350D | 18" (457 mm) | 18" (457 mm) | 6½" (165 mm) | 2 | 17" (432 mm) | 21" (533 mm) | 24" (610 mm) | 20½" (445 mm) |

| MODEL NUMBER | PUMP m ³ /h | ELECTRICAL | WEIGHT | BOX DIMENSIONS | | |
|--------------|---------------------------|------------|--|-----------------|-----------------|-----------------|
| | | | | WIDTH | DEPTH | HEIGHT |
| 350 | 21 | 115/60/1 | Net 171 lbs. (78 kg) Ship 231 lbs. (105 kg) | 32" (813 mm) | 25" (635 mm) | 30" (686 mm) |
| 350D | 21 | 115/60/1 | Net 184 lbs. (84 kg) Ship 244 lbs. (111 kg) | 32" (813 mm) | 25" (635 mm) | 30" (686 mm) |



P.O. Box 696 ■ Louisville, KY 40201 ■ Toll-free: 1-800-814-2028 ■ Local: 502-778-2791 ■ Quote & Order Fax: 1-800-444-0602

NOTE: As we continually strive to improve our products, specifications are necessarily subject to change without notice.