




Specifications

F.O.B Sedalia, Missouri 65301

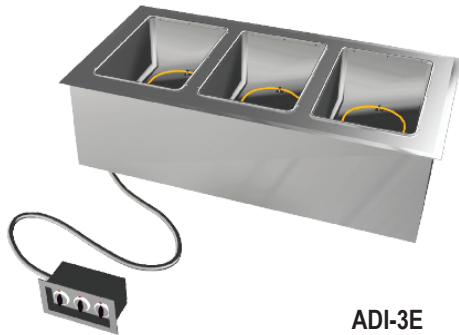

ADI-3E

OPTIONS:

- 3 phase wiring (except ADI-1E)
- 1,000 watt element (not available on 120V 5- and 6-well units)
- Glass display shelves - **98x Series**
- Serving shelves - **956/956-460-x Series**
- Buffet shelves - **83x, 93xIFL, 93xHT, 93xBL**
- Self-service canopies - **TS530-xx, TS530-xx-1SN**
- Stainless spillage pans - **676**
- Telescope covers - **548, 546**
- Removable S/S carving station - **CS-2**
- Adapter Plates - **31, 32, 33**
- Adapter Bars - **513, 516**

AGENCY LISTING:



DUKE MANUFACTURING CO.
 2305 N. Broadway
 St. Louis, MO 63102

800.735.3853 Toll Free
 314.231.5074 Fax
 www.dukemfg.com

Approval Stamp(s):

PRODUCT INFORMATION:

PROJECT: _____

ITEM: _____

QUANTITY: _____

MODEL:

Drop-Ins

Hot Food - Electric

- | | |
|---------------------------------|--------------------------------|
| <input type="checkbox"/> ADI-1E | 18-1/4"L x 24-1/4"W x 12-3/4"H |
| <input type="checkbox"/> ADI-2E | 32-1/4"L x 24-1/4"W x 12-3/4"H |
| <input type="checkbox"/> ADI-3E | 46-1/4"L x 24-1/4"W x 12-3/4"H |
| <input type="checkbox"/> ADI-4E | 60-1/4"L x 24-1/4"W x 12-3/4"H |
| <input type="checkbox"/> ADI-5E | 74-1/4"L x 24-1/4"W x 12-3/4"H |
| <input type="checkbox"/> ADI-6E | 88-1/4"L x 24-1/4"W x 12-3/4"H |

TOP RIM:

- Heavy gauge, 300 Series stainless steel
- 15/16" overhang on front, back and ends
- Reinforced rim
- Vinyl foam gasket as sealant
- Die-stamped openings - 12-1/16" x 20-1/16"

HEAT COMPARTMENTS:

- Exposed element in each compartment
 - 500 watt, 120 Volt/1 Ph
 - 750 watt, 208 Volt/1 Ph
 - 750 watt, 240 Volt/1 Ph
- 8" deep stainless steel liner, dry operation
- Insulated bottom
- Includes #576 aluminum spillage pans

CONTROL PANEL:

- Stainless steel face plate, plastic knobs
- UL approved
- Infinite switch controls in remote box
- 2 panels on units with 4, 5 or 6 wells

EXTERIOR HOUSING

- Heavy gauge paint grip steel


SHORT FORM SPECIFICATIONS:

Duke Drop-In - Hot Food - Electric. Top rim to be constructed of heavy gauge, 300 Series stainless steel with 15/16" overhand on front, back and ends. Rim to be reinforced with heavy gauge steel angle and provided with vinyl foam gasket as sealant with top surface. Top to have die-stamped openings, each measuring 12-1/6" x 20-1/6" (front to back). Heat compartments to be die-formed, 8" deep, of stainless steel and insulated on all four sides, bottom and between sections with 1" fiberglass. Each compartment to have 500 or 700 watt electric element fitted inside warming compartment, above insulated bottom and come furnished with #576 aluminum spillage pan. Unit to be wired to operate on 120, 208 or 240 volts, as specified, with single phase standard for hard wired in field only. Three phase available. Control panel of stainless steel. UL approved remote control designed for installation on operator's side. Infinite switch controls. Two remote control panels for 4-, 5- and 6- well models. Exterior to be of heavy gauge steel




**DROP-INS
HOT FOOD - ELECTRIC**


- ADI-1E** 18-1/4"L x 24-1/4"W x 12-3/4"H
- ADI-2E** 32-1/4"L x 24-1/4"W x 12-3/4"H
- ADI-3E** 46-1/4"L x 24-1/4"W x 12-3/4"H
- ADI-4E** 60-1/4"L x 24-1/4"W x 12-3/4"H
- ADI-5E** 74-1/4"L x 24-1/4"W x 12-3/4"H
- ADI-6E** 88-1/4"L x 24-1/4"W x 12-3/4"H

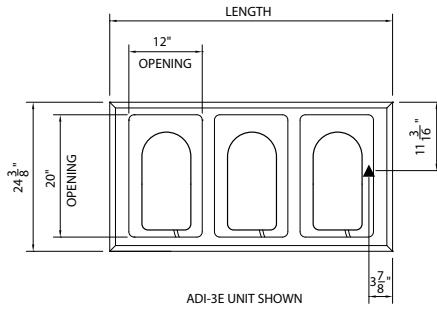

ADI-3E UNIT SHOWN
TOP VIEW

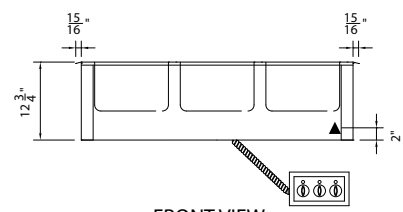

FRONT VIEW



RIGHT SIDE VIEW

| LEGEND | |
|--|-----------------------|
| ▲ | ELECTRICAL CONNECTION |
| Allow 4" gap between controls and unit | |

FREIGHT CLASS: 100

| Model | Length | | Width | | Height | | Top Openings | Cutout Length | | Cutout Width | | Control Panels | Cube ft. Crated | Weight | |
|--------|--------|-------|--------|------|--------|------|--------------|---------------|-------|--------------|------|----------------|-----------------|--------|-------|
| | in. | cm | in. | cm | in. | cm | | in. | cm | in. | cm | | | lbs. | kg. |
| ADI-1E | 18-1/4 | 46.4 | 24-1/4 | 61.6 | 12-3/4 | 32.4 | 1 | 17 | 43.2 | 23 | 58.4 | 1 | 8.2 | 43 | 19.6 |
| ADI-2E | 32-1/4 | 81.9 | 24-1/4 | 61.6 | 12-3/4 | 32.4 | 2 | 31 | 78.7 | 23 | 58.4 | 1 | 13.0 | 75 | 34.1 |
| ADI-3E | 46-1/4 | 117.5 | 24-1/4 | 61.6 | 12-3/4 | 32.4 | 3 | 45 | 114.3 | 23 | 58.4 | 1 | 17.7 | 90 | 40.9 |
| ADI-4E | 60-1/4 | 153.0 | 24-1/4 | 61.6 | 12-3/4 | 32.4 | 4 | 59 | 149.9 | 23 | 58.4 | 2 | 22.5 | 115 | 52.3 |
| ADI-5E | 74-1/4 | 188.6 | 24-1/4 | 61.6 | 12-3/4 | 32.4 | 5 | 73 | 185.4 | 23 | 58.4 | 2 | 27.2 | 140 | 63.6 |
| ADI-6E | 88-1/4 | 224.2 | 24-1/4 | 61.6 | 12-3/4 | 32.4 | 3 | 87 | 221.0 | 23 | 58.4 | 2 | 32.0 | 220 | 100.0 |

REMOTE CONTROL CUTOUT IS 9" X 4-3/8"

| Model | 120 Volt/500 Watt | | 208 Volt/750 Watt | | 240 Volt/750 Watt | |
|--------|-------------------|------|-------------------|------|-------------------|------|
| | watts | amps | watts | amps | watts | amps |
| ADI-1E | 500 | 4.2 | 750 | 3.6 | 750 | 3.1 |
| ADI-2E | 1000 | 8.3 | 1500 | 7.2 | 1500 | 6.3 |
| ADI-3E | 1500 | 12.5 | 2250 | 10.8 | 2250 | 9.4 |
| ADI-4E | 2000 | 16.7 | 3000 | 14.4 | 3000 | 12.5 |
| ADI-5E | 2500 | 20.8 | 3750 | 18.0 | 3750 | 15.6 |
| ADI-6E | n/a | n/a | 4500 | 21.6 | 4500 | 18.8 |



DUKE MANUFACTURING CO.
2305 N. Broadway
St. Louis, MO 63102

800.735.3853 Toll Free
800.231.1130 In Missouri
314.231.5074 Fax
www.dukemfg.com

Specification subject to change