



Your Solutions Partner

Specifications

F.O.B Sedalia, Missouri 65301



ASI-3E-SW

OPTIONS:

- 3 phase wiring (except **ASI-1E-SW**)
- Manifold, per well
- Master globe valve
- Individual valves - **per section**
- Glass display shelves - **98x Series**
- Serving shelves - **956/956-460-x Series**
- Buffet shelves - **83x, 93xIFL, 93xHT, 93xBL**
- Self-service canopies - **TS530-xx, TS530-xx-1SN**
- Telescope covers - **548, 546**
- Hardwood carving board
- S/S carving surface - **445-S**
- S/S dish shelf - **444-S**
- Removable S/S carving station - **CS-2**
- Adapter Plates - **31, 32, 33**
- Drop-in style top rim

AGENCY LISTING:



DUKE MANUFACTURING CO.
2305 N. Broadway
St. Louis, MO 63102

800.735.3853 Toll Free
314.231.5074 Fax
www.dukemfg.com

Approval Stamp(s):

PRODUCT INFORMATION:

PROJECT: _____

ITEM: _____

QUANTITY: _____

MODEL:

Slide-In

Hot Food - Electric - Sealed Well

- ASI-1E-SW** 18-1/4"L x 23-1/2"W x 12-3/4"H
- ASI-2E-SW** 32-1/4"L x 23-1/2"W x 12-3/4"H
- ASI-3E-SW** 46-1/4"L x 23-1/2"W x 12-3/4"H
- ASI-4E-SW** 60-1/4"L x 23-1/2"W x 12-3/4"H
- ASI-5E-SW** 74-1/4"L x 23-1/2"W x 12-3/4"H
- ASI-6E-SW** 88-1/4"L x 23-1/2"W x 12-3/4"H

TOP RIM:

- Heavy gauge, 300 Series stainless steel
- Die-stamped openings - 12-1/16" x 20-1/16"
- 15/16" overhang on back and ends
- Reinforced rim
- Vinyl foam gasket as sealant

HEAT COMPARTMENTS:

- 6-1/4" deep stainless steel liner, wet or dry operation
- Element under each compartment
 - 750 watt, 120 Volt/1 Ph
 - 900 watt, 208 Volt/1 Ph
 - 1200 watt, 240 Volt/1 Ph
- Individual open drains
- Individual thermostat controls and indicator lights
- Master switch and chrome knob guards
- Insulated bottom

EXTERIOR HOUSING

- Heavy gauge paint grip steel on one side and both ends
- Stainless steel on operator's side


SHORT FORM SPECIFICATIONS:

Duke Slide-Ins - Hot Food - Electric - Sealed Wells. Top rim to be constructed of heavy gauge, 300 Series stainless steel with 15/16" overhang on back and ends with operator's side turned down. Rim to be reinforced with heavy gauge steel angle and provided with vinyl foam gasket as sealant with top surface. Top shall be provided with die-stamped openings, each measuring 12-1/6" x 20-1/16" (front to back). Heat compartments shall have die-formed, 6-1/4" deep liners, fabricated of stainless steel and insulated on all four sides. Each compartment to have 750 watt @ 120 volts, 900 watts @ 108 volts or 1200 watts @ 240 volts electric element fitted under warming compartment, above insulated bottom. Unit to be wired to operate on voltage as specified, with single phase standard for hard wired in field only. Three phase available. Thermostat controls. Exterior to be of heavy gauge steel on one side and both ends. Operator's side to be heavy gauge stainless steel.




**SLIDE-INS
HOT FOOD - ELECTRIC - SEALED WELL**

- **ASI-1E-SW** 18-1/4" L x 23-1/2" W x 12-3/4" H
- **ASI-2E-SW** 32-1/4" L x 23-1/2" W x 12-3/4" H
- **ASI-3E-SW** 46-1/4" L x 23-1/2" W x 12-3/4" H
- **ASI-4E-SW** 60-1/4" L x 23-1/2" W x 12-3/4" H
- **ASI-5E-SW** 74-1/4" L x 23-1/2" W x 12-3/4" H
- **ASI-6E-SW** 88-1/4" L x 23-1/2" W x 12-3/4" H

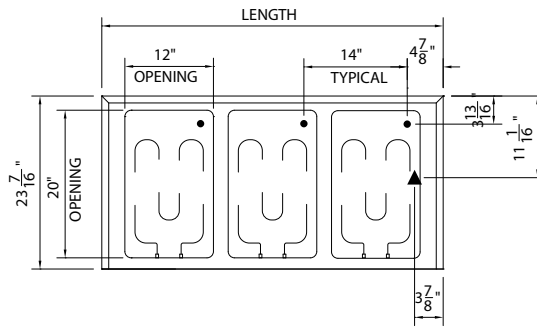


ASI-3E-SW UNIT SHOWN

TOP VIEW

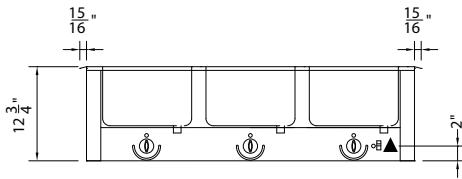

FRONT VIEW



RIGHT SIDE VIEW

LEGEND	
▲	- ELECTRICAL CONNECTION
●	- DRAIN LOCATION

DIMENSIONS:

FREIGHT CLASS: 100

Model	Length		Width		Height		Top Openings	Cutout Length		Cutout Width		Cube ft. Crated	Weight	
	in.	cm	in	cm	in	cm		in.	cm	in.	cm		lbs.	kg.
ASI-1E-SW	18-1/4	46.4	23-1/2	59.7	12-3/4	32.4	1	17	43.2	23	58.4	8.0	43	19.6
ASI-2E-SW	32-1/4	81.9	23-1/2	59.7	12-3/4	32.4	2	31	78.7	23	58.4	12.6	75	34.1
ASI-3E-SW	46-1/4	117.5	23-1/2	59.7	12-3/4	32.4	3	45	114.3	23	58.4	17.3	90	40.9
ASI-4E-SW	60-1/4	153.0	23-1/2	59.7	12-3/4	32.4	4	59	149.9	23	58.4	21.9	115	52.3
ASI-5E-SW	74-1/4	188.6	23-1/2	59.7	12-3/4	32.4	5	73	185.4	23	58.4	26.5	140	63.6
ASI-6E-SW	88-1/4	224.2	23-1/2	59.7	12-3/4	32.4	6	87	221.0	23	58.4	31.3	220	100.0

ELECTRICAL SPECIFICATIONS: (Consult factory for 3-phase electrical requirements and other options)

Model	120 Volt/750 Watt		208 Volt/900 Watt		240 Volt/1200 Watt	
	watts	amps	watts	amps	watts	amps
ASI-1E-SW	750	6.3	900	4.4	1200	5.0
ASI-2E-SW	1500	12.5	1800	8.7	2400	10.0
ASI-3E-SW	2250	18.8	2700	13.0	3600	15.0
ASI-4E-SW	3000	25.0	3600	17.3	4800	20.0
ASI-5E-SW	3750	31.3	4500	21.6	6000	25.0
ASI-6E-SW	N/A	N/A	5400	26.0	7200	30.0

DUKE MANUFACTURING CO.

2305 N. Broadway
St. Louis, MO 63102

800.735.3853 Toll Free
800.231.1130 In Missouri
314.231.5074 Fax
www.dukemfg.com

