



Specifications

F.O.B Sedalia, Missouri 65301



2203



2204

OPTIONS:

- Enclosed base - 6" high
- Cord and plug - 8'
- Casters - 5" polyurethane, 2 swivel w/brakes 2 rigid
- Push bar
- Bumpers - stainless steel
- Door Panels - laminated plastic
- Additional pair 3" angle slides
- Door locks
- 440-480V Circuit
- Celsius thermometer in lieu of Fahrenheit
- 208V/1Ph; 208V/3Ph; 240V/1 PH; 240/3PH

AGENCY LISTING:



DUKE MANUFACTURING CO.
2305 N. Broadway
St. Louis, MO 63102

800.735.3853 Toll Free
314.231.5074 Fax
www.dukemfg.com

Approval Stamp(s):

PRODUCT INFORMATION:

PROJECT: _____

ITEM: _____

QUANTITY: _____

MODEL:

Thermotainer Food Holding Cabinets - "A" Series 9"H x 14"W x 23-1/2" D Compartments

- 2203** Reach-In 1 thermostat per compartment , w/ legs
- 2203P** Pass-Thru 1 thermostat per compartment , w/ legs
- 2204** Reach-In 1 thermostat per compartment , w/ legs
- 2204P** Pass-Thru 1 thermostat per compartment , w/ legs

BODY:

- Heavy gauge stainless steel, all panels except bottom
- Shell welded to interior
- Die-stamped compartment openings
- Top 14 ga. S/S w/1" turned down edge and 1" overhang on all sides

DOORS:

- Stainless steel, die-stamped, embossed front
- Ribbed Interior
- Reinforced for mounting hardware
- Insulated with fiberglass
- Spring hinges die-stamped, with built-in-stop externally adjustable, completely concealed

COMPARTMENT:

- Heavy gauge stainless steel
- Rounded corners
- Stainless steel studs for angle slides at 3 levels
- (2) removable, adjustable, stainless steel, 5" angled slide pairs
- Removable liner for inspection and maintenance

ELECTRICAL CONTROLS:

- Recessed thermostat w/built-in On-Off switch
- Heat range 100° - 300° and dial thermometer
- Pilot lights
- Recessed connection box
- Removable access panel

DAMPERS:

- 2-position sliding type
- Controlled by push buttons
- Compartments individually controlled

INSULATION:

- Body fully insulated with 1-1/2" fiberglass

HEATING ELEMENTS:

- Sheath type strip heaters, 120 Volt, 1 Phase
- Removable compartment for ease of access to heating elements.

LEGS:

- Stainless steel die-stamped adjustable - 6"



SHORT FORM SPECIFICATIONS:

Duke Thermotainers Food Holding Cabinets. Models 2203/2203P constructed with six (6) compartments. Models 2204/2204P to have eight (8) compartments. Compartments 9"H x 14"W x 23-1/2"D. Each compartment to have two (2) pairs of removable stainless steel slides. One thermostat per compartment. 100° - 300°F heat range with dial thermometer. Built-in installation - allow 1/4" tolerance greater than body width.



**THERMOTAINER FOOD HOLDING CABINETS - "A" SERIES
9"H x 14"W x 23-1/2"D COMPARTMENTS**

- 2203 Reach-In 1 thermostat per compartment, w/ legs
- 2203P Pass-Thru 1 thermostat per compartment, w/ legs
- 2204 Reach-In 1 thermostat per compartment, w/ legs
- 2204P Pass-Thru 1 thermostat per compartment, w/ legs

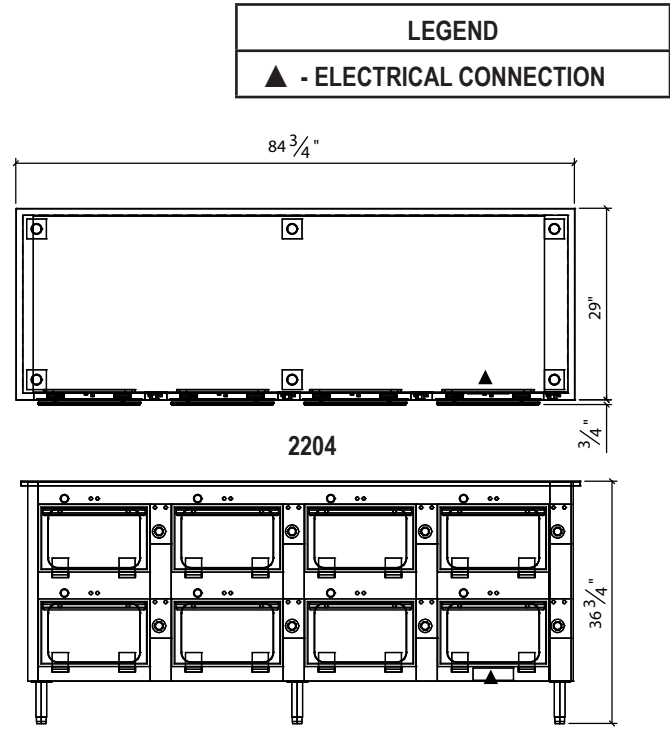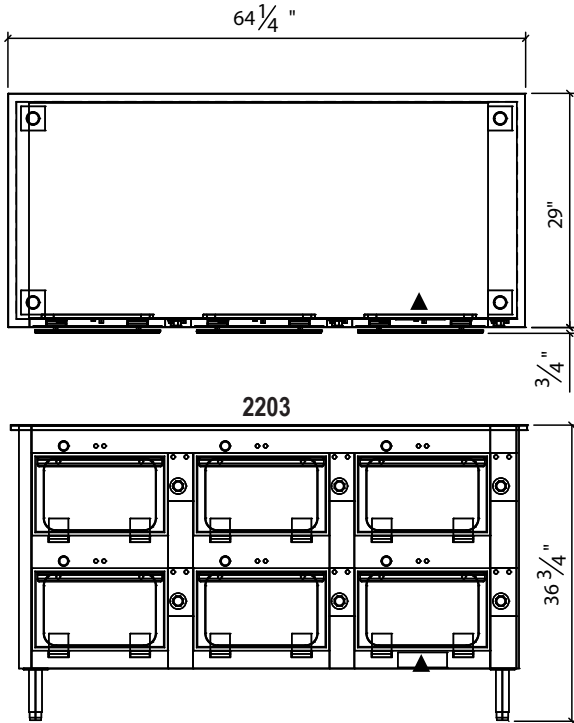

DIMENSIONS:

Freight Class: 100

Model	Width		Depth		Height		omp. Depth		Cube ft. crated	Weight	
	in.	cm.	in.	cm.	in.	cm	in.	cm		lbs.	kg
2203	64-1/4	163.2	29-3/4	75.6	36-3/4	93.4	23-1/2	59.7	61.4	700	318.2
2203P	64-1/4	163.2	30-1/2	77.5	36-3/4	93.4	25-1/2	64.8	64.6	700	318.2
2204	84-1/4	215.3	29-3/4	75.6	36-3/4	93.4	23-1/2	59.7	79.3	800	363.6
2204P	84-1/4	215.3	30-1/2	77.5	36-3/4	93.4	25-1/2	64.8	83.4	800	363.6

ELECTRICAL SPECIFICATIONS: (Consult factory for 3-phase electrical requirements and other options.)

Model	Connected Load
2203	4500 watts
2203P	4500 watts
2204	6000 watts
2204P	6000 watts

	2203/2203P	2204/2204P
Capacity w/standard slides	(18) 12" x 20" x 2" pans or (12) 12" x 20" x 4" pans or (6) 12" x 20" x 8" pans	(24) 12" x 20" x 2" pans or (16) 12" x 20" x 4" pans or (8) 12" x 20" x 8" pans

- 2203 Reach In - hinged doors on front only
- 2203P Pass Thru - hinged doors on front & back for pass-thru service
- 2204 Reach In - hinged doors on front only
- 2204P Pass Thru - hinged doors on front & back for pass-thru service



DUKE MANUFACTURING CO.

2305 N. Broadway
St. Louis, MO 63102

800.735.3853 Toll Free
800.231.1130 In Missouri
314.231.5074 Fax
www.dukemfg.com

Specification subject to change