



# Specifications

F.O.B Sedalia, Missouri 65301



1253

### OPTIONS:

- Enclosed base - 6" high
- Cord and plug - 8'
- Casters - 5" polyurethane, 2 swivel w/brakes 2 rigid
- Push bar
- Bumpers - stainless steel
- Door Panels - laminated plastic
- Additional 5" angle slides
- Door locks
- 440-480V Circuit
- Celsius thermometer in lieu of Fahrenheit
- 208V/1Ph; 208V/3Ph; 240V/1 PH; 240/3PH

### AGENCY LISTING:



**DUKE MANUFACTURING CO.**  
 2305 N. Broadway  
 St. Louis, MO 63102

800.735.3853 Toll Free  
 314.231.5074 Fax  
 www.dukemfg.com

## Approval Stamp(s):

### PRODUCT INFORMATION:

PROJECT: \_\_\_\_\_  
 ITEM: \_\_\_\_\_  
 QUANTITY: \_\_\_\_\_

### MODEL:

## Thermotainer Food Holding Cabinets - "D" Series 16-3/4"H x 22"W x 28-1/2" D Compartments

- 1253** Reach-In 1 thermostat per compartment, w/legs
- 1253P** Pass-Thru 1 thermostat per compartment, w/legs

### BODY:

- Heavy gauge stainless steel, all panels except bottom
- Shell welded to interior
- Die-stamped compartment openings

### DOORS:

- Stainless steel Uni-Door construction
- Operate simultaneously, either opening or closing
- Overhead operating unit
- Automatic stop holds open position
- Spring hinges die-stamped, with built-in-stop externally adjustable, completely concealed

### COMPARTMENT:

- Heavy gauge stainless steel
- Rounded corners
- Stainless steel studs for angle slides at 9 levels
- (3) removable, adjustable, stainless steel, 5" angled slide pairs
- Removable liner for inspection and maintenance

### ELECTRICAL CONTROLS:

- Recessed thermostat w/built-in On-Off switch
- Heat range 100° - 300° and dial thermometer
- Pilot lights
- Recessed connection box
- Thermostat, pilot lights set in removable access panel

### DAMPERS:

- 2-position sliding type
- Controlled by push buttons
- Compartments individually controlled

### INSULATION:

- Body fully insulated with 1-1/2" fiberglass, doors with fiberglass

### HEATING ELEMENTS:

- Sheath type strip heaters, 120 Volt, 1 Phase
- Removable compartment for ease of access to heating elements.

### LEGS:

- Stainless steel die-stamped adjustable - 6" high

### SHORT FORM SPECIFICATIONS:


**Duke Thermotainers Food Holding Cabinets.** Models 1253/1253P constructed with three (3) compartments. Compartment 22"W x 16-3/4"H x 28-1/2"D. Each compartment to have three (3) pairs of removable stainless steel slides. One thermostat controls all compartments. 100°-300°F heat range and dial thermometer, with 6" high stainless steel legs. Built-in installation - allow 1/4" tolerance greater than body width. Adjustable low base.



**THERMOTAINER FOOD HOLDING CABINETS - "D" SERIES  
16-3/4"H x 22"W x 28-1/2"D COMPARTMENTS**

- 1253 Reach-In 1 thermostat per compartment, w/legs
- 1253P Pass-Thru 1 thermostat per compartment, w/legs

LEGEND
▲ - ELECTRICAL CONNECTION

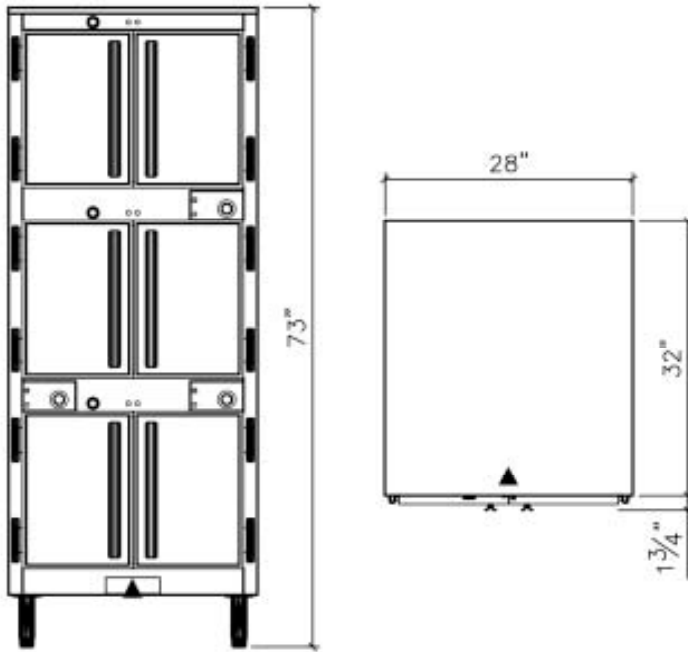

**DIMENSIONS:**

Freight Class: 100

Model	Width		Depth		Height		Comp. Depth		Cube ft. crated	Weight	
	in.	cm.	in.	cm.	in.	cm	in.	cm		lbs.	kg
1253	28	71.1	33-3/4	85.7	73	185.4	28-1/2	72.4	60.2	600	272.7
1253P	28	71.1	35-1/2	90.2	73	185.4	30-1/2	77.5	63.0	600	272.7

**ELECTRICAL SPECIFICATIONS:** (Consult factory for 3-phase electrical requirements and other options.)

Model	Connected Load		1253/1253P
1253	3000 watts	<b>Capacity w/standard slides</b>	(30) 12" x 20" x 2" pans or (18) 12" x 20" x 4" pans or (6) 12" x 20" x 8" pans (15) 18" x 26" bake sheets
1253P	3000 watts		

- 1253 Reach In - hinged doors on front only
- 1253P Pass Thru - hinged doors on front & back for pass-thru service



**DUKE MANUFACTURING CO.**  
2305 N. Broadway  
St. Louis, MO 63102

800.735.3853 Toll Free  
800.231.1130 In Missouri  
314.231.5074 Fax  
[www.dukemfg.com](http://www.dukemfg.com)

Specification subject to change