

APPLICATION:


JOB NAME:

QUANTITY: _____ **ITEM NO.:** _____

PRODUCT NAME:
 EXPOSED REEL RINSE WALL
 MOUNTED WITH SPRAY VALVE

_____ **SPECIAL CONFIGURATION**
 CHECK BASE MODEL AND OPTIONS

MODEL:
 2980

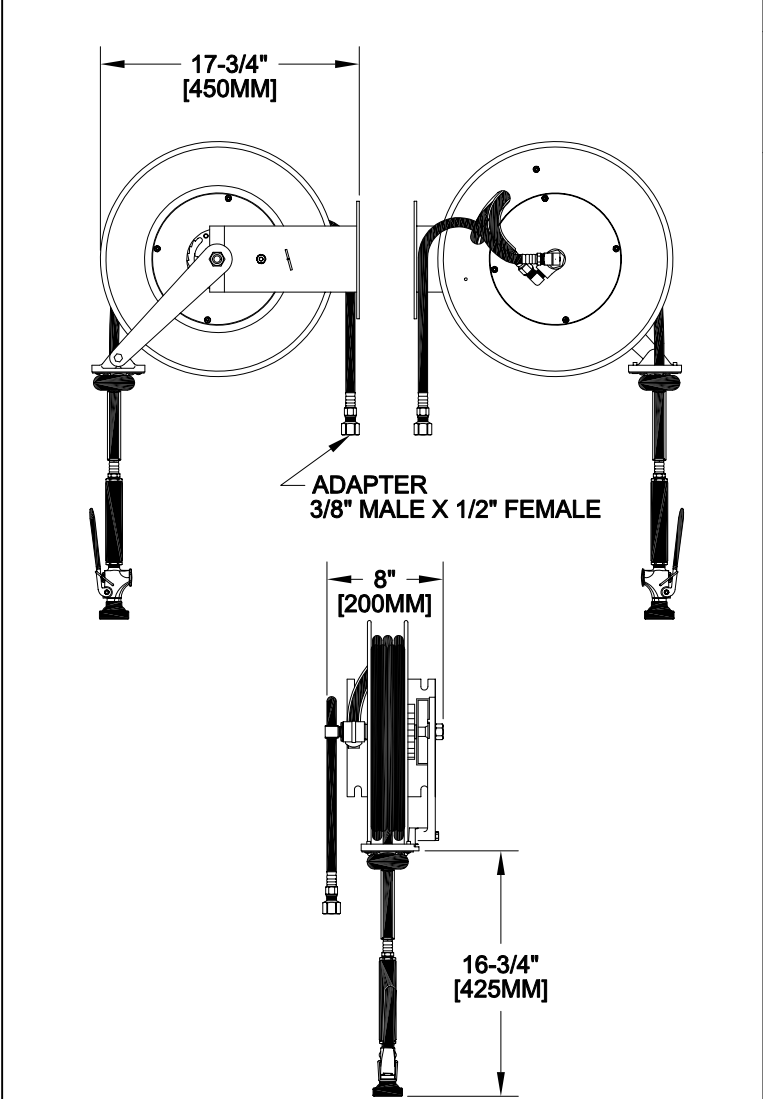

OPTIONS OR MODIFICATIONS:

BRUSH

OTHER _____

FEATURES


- REEL**
- * SELF-LOCKING
 - * EXPOSED HOSE
 - * 35' LENGTH REEL HOSE
 - * 19" LENGTH INLET HOSE
 - * 3 PLY FIBER REINFORCED RUBBER HOSE
 - * ADJUSTABLE BALL STOP

- PRO SPRAY VALVE**
- * NOZZLE THREADED INTO VALVE
 - * 2.65 GPM AT 80 PSI
 - * SHOWER SPRAY PATTERN

- SYSTEM LIMITS**
- * TEMP: 40°F MIN. TO 140°F MAX.
 - * PRESSURE: 200 PSI MAX. STATIC

- SHIPPING WEIGHT**
- * 34.0 LBS

ROUGH-IN: SEE MOUNTING PLATE BELOW

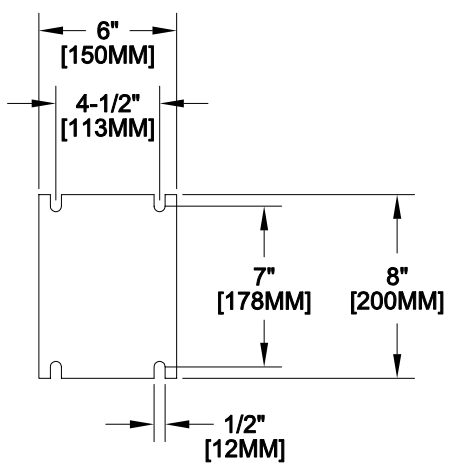

FISHER
 FISHER MANUFACTURING COMPANY
 TOLL FREE: 800-421-6162 - FAX: 800-832-8238
 information@fisher-mfg.com - www.fisher-mfg.com