



FLAV-R-SAVOR® TALL DRY HOLDING CABINETS

Models PFST-1X, PFST-2X

Hatco has a profitable way to build sales volume with the Flav-R-Savor® Tall Dry Holding Cabinet. Heat is diffused throughout the cabinet providing gentle, even heat while maintaining optimum serving temperatures. Even after the door is opened and closed, the cabinet temperature quickly recovers so product stays hot.

FLEXIBILITY

The Hatco Flav-R-Savor PFST series has an eight-shelf rack with 5" (127 mm) centers that can hold up to 16 *boxed* pizzas or eight *bagged* pizzas. Available in one- and two-door models with heavy-duty casters for easy portability, tempered glass sides for excellent visibility assuring proper delivery rotation, a temperature control to regulate the heat, and a monitor to indicate cabinet temperature.

QUALITY

The following features assure the finest performance for years to come:

- Heat is diffused throughout cabinet, providing even and gentle heat while maintaining optimum serving temperatures.
- The holding cabinet features tempered glass sides for full-view display.



Model PFST-2X
with 8-shelf rack

METAL SHEATHED AIR HEATING ELEMENTS
GUARANTEED AGAINST BURNOUT AND BREAKAGE
FOR TWO YEARS.



ANSI/NSF 4

HATCO CORPORATION P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.
(800) 558-0607 • (414) 671-6350 • Fax (800) 543-7521 • Int'l. Fax (414) 671-3976
www.hatcocorp.com • E-mail: equipsales@hatcocorp.com


Form No. PFST Spec Sheet

Printed in U.S.A.
June 2013



FLAV-R-SAVOR® TALL DRY HOLDING CABINETS

Models PFST-1X, PFST-2X

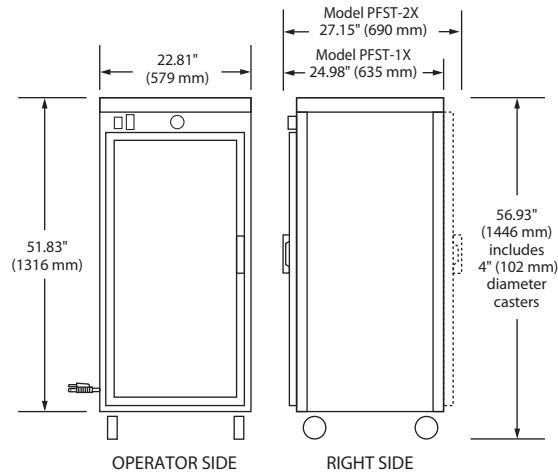

SPECIFICATIONS

Model	Type	Shipping Weight
PFST-1X	1 Door	178 lbs. (81 kg)
PFST-2X	2 Doors	178 lbs. (81 kg)

DIMENSIONS

PFST-1X: 22.81"W x 24.98"D x 56.93"H (with caster cart)
(579 x 635 x 1446 mm).

PFST-2X: 22.81"W x 27.15"D x 56.93"H (with caster cart)
(579 x 690 x 1446 mm).

Cabinet Opening: 18.75"W x 40.37"H (476 x 1025 mm).

Available Shelf Space: 17.97" Square x 4.64"H (456 x 118 mm).

VOLTAGE


120 volts, 1767 watts, 14.7 amps (uses NEMA 5-15P,
NEMA 5-20P – Canada).

Export voltages available


CORD LOCATION

Facing controls, left-hand side panel, lower right corner.

PLUG CONFIGURATIONS



Display Rack



8-Shelf Multi-Purpose Rack
Rack Opening: 4.60" (117 mm)

PRODUCT SPECS

Tall Dry Holding Cabinet

The Tall Dry Holding Cabinet shall be a Flav-R-Savor® Model ... rated at ... volts and ... watts, as manufactured by the Hatco Corporation, Milwaukee, WI 53234 U.S.A.

With 24/7 service (U.S and Canada only), the cabinet shall have ... door(s), tempered glass sides, stationary rack, and incandescent display lights. It shall include a temperature selector dial, on-off switch, and indicating lights. A 6' (1829 mm) cord with plug shall be attached.

HATCO CORPORATION P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. • (800) 558-0607 • (414) 671-6350
Fax (800) 543-7521 • Int'l. Fax (414) 671-3976 • www.hatcocorp.com • E-Mail: equipsales@hatcocorp.com