



# GLO-RAY® DESIGNER MERCHANDISING WARMERS

Models GR2SDH-24, -30, -36, -42, -48, -54, -60  
GR2SDS-24, -30, -36, -42, -48, -54, -60

ITEM#

GR2SDH-24D, -30D, -36D, -42D, -48D, -54D, -60D  
GR2SDS-24D, -30D, -36D, -42D, -48D, -54D, -60D

Designed to hold hot wrapped food at optimum serving temperatures without affecting quality, the Hatco Glo-Ray® Designer Merchandising Warmers are the perfect displays to showcase hot fast foods and boost impulse sales.

Combining state-of-the-art design with performance, these warmers place the focus on the product while holding hot food safely at proper serving temperatures. The modern design is perfect for front of the house use. Designer powdercoated inset panels blend these units with the décor while providing a durable, easy-to-clean surface.

Glo-Ray Designer Merchandising Warmers have prefocused infrared top heat and a thermostatically-controlled, hardcoated heated base to extend the holding times of most food. All models are made of aluminum with tempered glass end panels. Shatter-resistant incandescent lights illuminate the food holding area.

### FLEXIBILITY

This warmer offers the convenience of self-serve and the efficiency of kitchen-to-server holding.

Available with slant or horizontal shelves, the Glo-Ray Designer Merchandising Warmers are offered in both single and dual shelf models. The Designer series warmers come standard with black inset panels and black end caps. Choose from six other color options to blend the warmer with any décor. Non-standard colors are non-returnable.

### QUALITY

The following features assure the finest performance for years to come:

- All models have prefocused infrared top heat directing heat to the outer edges of the holding surface where heat loss is the greatest.
- These warmers feature a thermostatically-controlled, hardcoated heated base, Designer color inset panels, 4" (102 mm) Designer legs, and a cord and plug set.
- Available in heated surface widths from 23.88" to 59.88" (606 to 1521 mm) with overall widths of 30.25" to 66.25" (768 to 1683 mm).
- Shatter-resistant incandescent lights enhance product display while safeguarding food products from bulb breakage.
- An optional Indicating Temperature Control enhances accurate control of temperature.



Model GR2SDH-30 with Designer color inset panels



Model GR2SDS-30D with Designer color inset panels



Equipment  
On Signage Program  
[Hatcographics.com](http://Hatcographics.com)

### Divider Rods

Model Width	Divider Rods Provided	Average Chute Width
30.25" ( 768 mm)	5 Rods per Shelf	3.73" ( 95 mm)
36.25" ( 921 mm)	6 Rods per Shelf	4.02" (102 mm)
42.25" (1073 mm)	7 Rods per Shelf	4.23" (107 mm)
48.25" (1226 mm)	8 Rods per Shelf	4.40" (111 mm)
54.25" (1378 mm)	9 Rods per Shelf	4.54" (115 mm)
60.25" (1530 mm)	10 Rods per Shelf	4.65" (118 mm)
66.25" (1683 mm)	12 Rods per Shelf	4.36" (110 mm)



ONE YEAR ON-SITE PARTS AND LABOR WARRANTY, PLUS ONE ADDITIONAL YEAR PARTS-ONLY WARRANTY ON ALL GLO-RAY METAL SHEATHED HEATING ELEMENTS.

HATCO CORPORATION P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.  
(800) 558-0607 • (414) 671-6350 • Fax (800) 543-7521 • Int'l. Fax (414) 671-3976  
[www.hatcocorp.com](http://www.hatcocorp.com) • E-mail: [equipsales@hatcocorp.com](mailto:equipsales@hatcocorp.com)

Form No. GR2SD Spec Sheet


Printed in U.S.A.  
October 2012




# GLO-RAY® DESIGNER MERCHANDISING WARMERS

Models GR2SDH-24, -30, -36, -42, -48, -54, -60  
GR2SDS-24, -30, -36, -42, -48, -54, -60


GR2SDH-24D, -30D, -36D, -42D, -48D, -54D, -60D  
GR2SDS-24D, -30D, -36D, -42D, -48D, -54D, -60D




GR2SDH  
Models

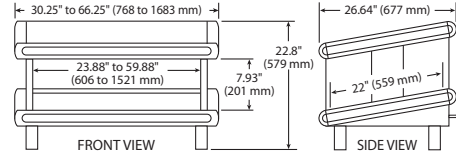

GR2SDS  
Models

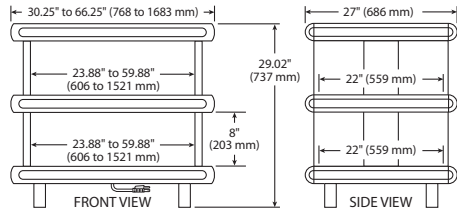

GR2SDH-D  
Models

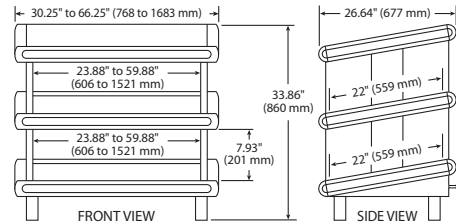

GR2SDS-D  
Models

## SPECIFICATIONS

### Horizontal Models

	Model*	Watts	Amps	Width	Shipping Weight
Single Shelf	GR2SDH-24	820	6.6	30.25" ( 768 mm)	87 lbs. ( 40 kg)
	GR2SDH-30	1020	8.5	36.25" ( 921 mm)	120 lbs. ( 55 kg)
	GR2SDH-36	1220	10.2	42.25" (1073 mm)	129 lbs. ( 59 kg)
	GR2SDH-42	1490	12.4	8.25" (1226 mm)	138 lbs. ( 63 kg)
	GR2SDH-48	1690	14.1	54.25" (1378 mm)	160 lbs. ( 73 kg)
	GR2SDH-54	1890	15.8	60.25" (1530 mm)	172 lbs. ( 78 kg)
Dual Shelf	GR2SDH-60	2210	18.4	66.25" (1683 mm)	187 lbs. ( 85 kg)
	GR2SDH-24D	1640	13.7	30.25" ( 768 mm)	150 lbs. ( 68 kg)
	GR2SDH-30D	2040	8.5	36.25" ( 921 mm)	178 lbs. ( 81 kg)
	GR2SDH-36D	2440	10.2	42.25" (1073 mm)	198 lbs. ( 90 kg)
	GR2SDH-42D	2980	12.4	48.25" (1226 mm)	218 lbs. ( 99 kg)
	GR2SDH-48D	3380	14.1	54.25" (1378 mm)	238 lbs. (108 kg)
	GR2SDH-54D	3780	15.8	60.25" (1530 mm)	258 lbs. (117 kg)
	GR2SDH-60D	4420	18.4	66.25" (1683 mm)	280 lbs. (127 kg)

### Slant Models

	Model*	Watts	Amps	Width	Shipping Weight
Single Shelf	GR2SDS-24	820	6.6	30.25" ( 768 mm)	104 lbs. ( 47 kg)
	GR2SDS-30	1020	8.5	36.25" ( 921 mm)	116 lbs. ( 53 kg)
	GR2SDS-36	1220	10.2	42.25" (1073 mm)	136 lbs. ( 62 kg)
	GR2SDS-42	1490	12.4	48.25" (1226 mm)	155 lbs. ( 70 kg)
	GR2SDS-48	1690	14.1	54.25" (1378 mm)	164 lbs. ( 74 kg)
	GR2SDS-54	1890	15.8	60.25" (1530 mm)	182 lbs. ( 83 kg)
Dual Shelf	GR2SDS-60	2210	18.4	66.25" (1683 mm)	202 lbs. ( 92 kg)
	GR2SDS-24D	1640	13.7	30.25" ( 768 mm)	162 lbs. ( 74 kg)
	GR2SDS-30D	2040	8.5	36.25" ( 921 mm)	174 lbs. ( 79 kg)
	GR2SDS-36D	2440	10.2	42.25" (1073 mm)	190 lbs. ( 86 kg)
	GR2SDS-42D	2980	12.4	48.25" (1226 mm)	218 lbs. ( 99 kg)
	GR2SDS-48D	3380	14.1	54.25" (1378 mm)	240 lbs. (109 kg)
	GR2SDS-54D	3780	15.8	60.25" (1530 mm)	260 lbs. (118 kg)
	GR2SDS-60D	4420	18.4	66.25" (1683 mm)	296 lbs. (135 kg)

\* NSF requires units over 36" (914 mm) in width or weighing more than 80 lbs. (36 kg) to be either sealed, or raised on the installation surface with the 4" (102 mm) legs included.

## OPTIONS (NOT FOR RETROFIT)

- Unit and Inset Panel *Designer Colors*: Warm Red, Black, Gray Granite, White Granite, Navy Blue, Hunter Green, Antique Copper, non-standard colors are non-returnable on unit
- Dark Gray Corner Caps (Black is standard)
- 5" (127 mm) Sneeze Guard (Customer side only on slant models)
- Plexi-Glass Flip-up Doors
- Front Glass in lieu of channel dividers and divider rods

## PRODUCT SPECS

### Designer Merchandising Warmer

The *Designer Merchandising Warmer* shall be a Glo-Ray® Model ... as manufactured by the Hatco Corporation, Milwaukee, WI 53234 U.S.A.

The warmer shall be rated at ... watts, ... volts, and be ... inches (millimeters) in overall width. It shall consist of a thermostatically-controlled heated base, infrared heat from above, full-view tempered glass sides, *Designer* color inset panels, and incandescent display lights.

**HATCO CORPORATION P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. • (800) 558-0607 • (414) 671-6350**  
**Fax (800) 543-7521 • Int'l. Fax (414) 671-3976 • www.hatcocorp.com • E-mail: equipsales@hatcocorp.com**

## DIMENSIONS

### Horizontal Models (GR2SDH) –

Single: 30.25" - 66.25"W x 27"D\* x 18.08"H (768-1683 x 686 x 459 mm).  
Dual: 30.25" - 66.25"W x 27"D\* x 29.02"H (768-1683 x 686 x 737 mm).

### Slant Models (GR2SDS) –

Single: 30.25" - 66.25"W x 26.64"D\* x 22.8"H (768-1683 x 677 x 579 mm).  
Dual: 30.25" - 66.25"W x 26.64"D\* x 33.86"H (768-1683 x 677 x 860 mm).

Heated Surface: 23.88" - 59.88"W x 22"D (606-1521 x 559 mm).

\* Optional ITC: adds 1.83" (47 mm) to model depth.

## VOLTAGE

GR2SDH-24 to -48 & GR2SDS-24 to -48: 120 volts, single phase (uses NEMA 5-15P, models GR2SDH-42 to -48 & GR2SDS-42 to -48 uses NEMA 5-20P for Canada).

GR2SDH-54 & GR2SDS-54: 120 volts, single phase (uses NEMA 5-20P).

GR2SDH-60 & GR2SDS-60: 120 volts, single phase (uses NEMA 5-30P).

GR2SDH-24D & GR2SDS-24D: 120 volts, single phase

(uses NEMA 5-15P, uses NEMA 5-20P for Canada).

GR2SDH-30D to -54D & GR2SDS-30D to -54D: 120/208 volts,

or 120/240 volts, single phase, 4-wire (uses NEMA L14-20P).

GR2SDH-60D & GR2SDS-60D: 120/208 volts or 120/240 volts,

single phase, 4-wire (uses NEMA L14-30P).

Export voltages available.

## CORD LOCATION

Back center of base on control side.

## PLUG CONFIGURATIONS

NEMA 5-15P	NEMA 5-20P	NEMA 5-30P	NEMA L14-20P
NEMA L14-30P	CEE 7/7 Schuko	BS-1363	

- Indicating Temperature Control (ITC)
- Halogen Bulbs in lieu of Standard Display Lights
- Customer Side Front Glass (in lieu of Sneeze Guards or Flip-up Doors) (Cannot have channel dividers or divider rods)

## ACCESSORIES

- Additional Stainless Steel Divider Rods
- Flip-up Control Cover
- Display Sign Holder (Signs not included)

The infrared heating element shall be tubular metal sheathed and the warmer shall have a 6' (1829 mm) cord with plug attached.

Accessories shall include additional stainless steel dividers rods, flip-up doors, display sign holder, and control covers.

One year on-site parts and labor warranty, plus one additional year parts-only warranty on all Glo-Ray metal sheathed heating elements, with 24/7 service (U.S. and Canada only)