



## ULTRA-GLO™ DUAL CERAMIC INFRARED FOODWARMERS

Models: UGA-18D, -24D, -30D, -36D, -42D, -48D, -54D, -60D, -66D, -72D UGAH-18D, -24D, -30D, -36D, -42D, -48D, -54D, -60D, -66D, -72D  
 UGAL-18D, -24D, -30D, -36D, -42D, -48D, -54D, -60D, -66D, -72D UGAHL-18D, -24D, -30D, -36D, -42D, -48D, -54D, -60D, -66D, -72D

Hatco Ultra-Glo Ceramic Foodwarmers ensure maximum flavor, safety and holding time without continuing to cook the food. The prefocused heat pattern provides an increased pyramidal dimension, enveloping the food holding area not just side-to-side, but front-to-back. Heat is concentrated at the edges where heat loss is the greatest.

### FLEXIBILITY

The increased height of the ceramic heat source offers improved operational working clearances, giving the chef and server an improved ergonomic environment in which to work.


With a variety of widths and options, Ultra-Glo Ceramic Foodwarmers are adaptable to any location and configuration. Whether it's back or front-of-the-house use, open kitchen concepts or buffet lines, Ultra-Glo is available in continuous single or dual aluminum housings up to 6' (1829 mm), with or without lights. Angle brackets come standard, non-adjustable tubular stands are optional.

Ultra-Glo models have a clear anodized finish and are available in optional Gloss Finishes or standard *Designer* colors.

### QUALITY

The following features assure the finest performance for years to come:

- Available in widths from 18" to 72" (457-1829 mm).
- Sturdy extruded aluminum housings eliminate sagging.
- Prefocused heat maintains safe serving temperatures longer without continuing to cook the food.
- Variety of models, configurations and colors provide unlimited flexibility.
- Optional coated shatter-resistant incandescent lights enhance brilliant product display while safeguarding food from bulb breakage.

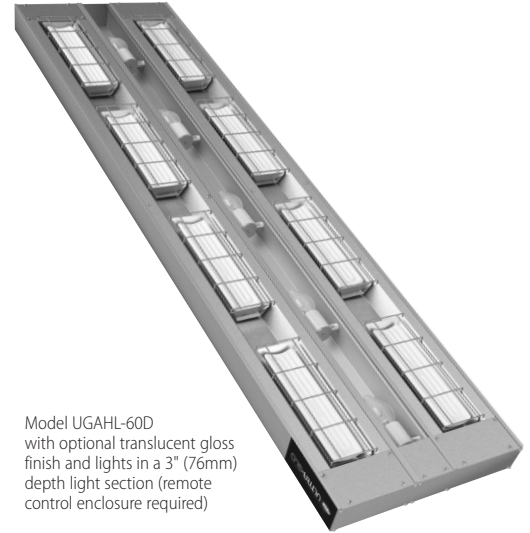

Model UGAHL-60D  
 with optional translucent gloss  
 finish and lights in a 3" (76mm)  
 depth light section (remote  
 control enclosure required)



Model UGAH-42D with 3" (76mm) spacer.  
 Remote control enclosure recommended (not shown)

CERAMIC HEATING ELEMENTS GUARANTEED AGAINST  
 BURNOUT FOR ONE YEAR.



HATCO CORPORATION P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.  
 (800) 558-0607 • (414) 671-6350 • Fax (800) 543-7521 • Int'l. Fax (414) 671-3976  
 www.hatcocorp.com • E-mail: equipsales@hatcocorp.com


Form No. UGA-D Spec Sheet

Printed in U.S.A.  
 November 2012



# ULTRA-GLO™ DUAL CERAMIC INFRARED FOODWARMERS

Models: UGA-18D, -24D, -30D, -36D, -42D, -48D, -54D, -60D, -66D, -72D UGAHL-18D, -24D, -30D, -36D, -42D, -48D, -54D, -60D, -66D, -72D  
 UGAL-18D, -24D, -30D, -36D, -42D, -48D, -54D, -60D, -66D, -72D UGAHL-18D, -24D, -30D, -36D, -42D, -48D, -54D, -60D, -66D, -72D

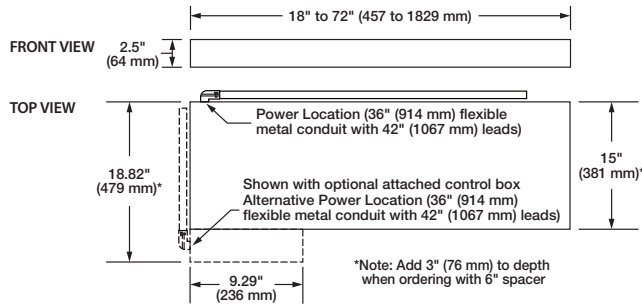

## SPECIFICATIONS: Dual Models - Aluminum

STANDARD WATT	WATTS	AMPS	HIGH WATT	WATTS	AMPS	WIDTH	SHIPPING WEIGHT*
UGA-18D 120V 208V 240V	1000 980 1000	8.3 4.7 4.2	UGAH-18D 120V 208V 240V	1300 1350 1300	10.8 6.5 5.4	18" ( 457 mm)	17 lbs. (8 kg)
UGA-24D 120V 208V 240V	1300 1350 1350	10.8 6.5 5.4	UGAH-24D 120V 208V 240V	1500 1500 1500	12.5 7.2 6.3	24" ( 610 mm)	19 lbs. (9 kg)
UGA-30D 120V 208V 240V	1500 1680 1800	12.5 8.1 7.5	UGAH-30D 120V 208V 240V	- 2250 2250	- 10.8 9.4	30" ( 762 mm)	21 lbs. (10 kg)
UGA-36D* 208V 240V	1960 2000	9.4 8.3	UGAH-36D* 208V 240V	2700 2600	13.0 10.8	36" ( 914 mm)	24 lbs. (11 kg)
UGA-42D*+ 208V circ 1 & 2 240V circ 1 & 2	840 900	4.0 3.8	UGAH-42D*+ 208V circ 1 & 2 240V circ 1 & 2	1500 1500	7.2 6.3	42" (1067 mm)	27 lbs. (12 kg)
UGA-48D*+ 208V circ 1 208V circ 2 208V 240V circ 1 240V circ 2 240V	1960 980 2000 1000	9.4 4.7 8.3 4.2	UGAH-48D*+ 208V circ 1 circ 2 240V circ 1 240V circ 2 240V	2700 1350 2600 1300	13.0 6.5 10.8 5.4	48" (1219 mm)	30 lbs. (14 kg)
UGA-54D*+ 208V circ 1 280V circ 2 280V 240V circ 1 240V circ 2 240V	1960 980 2000 1000	9.4 4.7 8.3 4.2	UGAH-54D*+ 208V circ 1 208V circ 2 208V 240V circ 1 240V circ 2 240V	3000 1500 3000 1500	14.4 7.2 12.5 6.3	54" (1372 mm)	33 lbs. (15 kg)
UGA-60D*+ 208V circ 1 & 2 208V 240V circ 1 & 2 240V	1960 2000	9.4 8.3	UGAH-60D*+ 208V circ 1 & 2 208V 240V circ 1 & 2 240V	2700 2600	13.0 10.8	60" (1524 mm)	37 lbs. (17 kg)
UGA-66D*+ 208V circ 1 & 2 208V 240V circ 1 & 2 240V	1960 2000	9.4 8.3	UGAH-66D*+ 208V circ 1 & 2 208V 240V circ 1 & 2 240V	2700 2600	13.0 10.8	66" (1676 mm)	40 lbs. (18 kg)
UGA-72D*+ 208V circ 1 & 2 208V 240V circ 1 & 2 240V	1960 2000	9.4 8.3	UGAH-72D*+ 208V circ 1 & 2 208V 240V circ 1 & 2 240V	3000 3000	14.4 12.5	72" (1829 mm)	44 lbs. (20 kg)

\* RMB not included. Add 2-8 lbs. (1-3 kg) to shipping weight depending on size of RMB. • Not available in 120V

† Shaded areas contain electrical information for **Export units only**.

+ Unit with multiple circuit connections. Each circuit may require a separate circuit breaker.

## DIMENSIONS

Dual Models with Remote Control Enclosure: 18"-72"W x 15"D▲ x 2.5"H (457-1829 x 381 x 64 mm).

Dual Models with Attached Control Box: 18"-72"W x 18.82"D▲ x 2.5"H (457-1829 x 478 x 64 mm).

Remote Control Enclosure: 5.5", 9", 14", 16", or 20"W x 3"D x 2.5"H (140, 229, 356, 406, or 508 x 76 x 64 mm).

Attached Control Box: 9.29" (dual) W x 3.88"D x 2.5"H (147 or 251 x 98 x 64 mm).

▲ Add 3" (76 mm) to depth when ordering dual models with 6" (152 mm) spacer.

## VOLTAGE

120, 208 and 240 volts, single phase. Models with Lights: 120, 120/208 and 120/240 volts, single phase.

## OPTIONS (NOT FOR RETROFIT)

- Designer Colors: Warm Red, Black, Gray Granite, White Granite, Navy Blue, Hunter Green, Antique Copper
- Gloss Finishes: Gleaming Gold, Glossy Gray, Bold Black, Radiant Red, Brilliant Blue
- Non-standard colors are non-returnable
- Remote Control Enclosure

## PRODUCT SPECS - Infrared Foodwarmer

The Infrared Foodwarmer shall be an Ultra-Glo™, manufactured by the Hatco Corporation, Milwaukee, WI 53234 U.S.A.

The Foodwarmer shall be an Ultra-Glo Model ..., rated at ... watts, ... volts, single phase and be ... inches (millimeters) in overall width.

**HATCO CORPORATION P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. • (800) 558-0607 • (414) 671-6350**  
**Fax (800) 543-7521 • Int'l. Fax (414) 671-3976 • www.hatcocorp.com • E-mail: equipsales@hatcocorp.com**

## SPECIFICATIONS: Dual Models with Lights - Aluminum

STANDARD WATT	WATTS	AMPS	HIGH WATT	WATTS	AMPS	WIDTH	Shipping Weight*
UGAL-18D 120V 120/208V 120/240V 240V	1060 1040 1060 1060	8.5 5.2 4.7 4.4	UGAHL-18D 120V 120/208V 120/240V 240V	1360 1410 1360 1360	11.3 7.0 5.9 5.7	18" ( 457 mm)	17 lbs. (8 kg)
UGAL-24D 120V 120/208V 120/240V 240V	1420 1470 1420 1420	11.8 7.5 6.4 5.9	UGAHL-24D 120V 120/208V 120/240V 240V	1620 1620 1620 1620	13.5 8.2 7.3 6.8	24" ( 610 mm)	19 lbs. (9 kg)
UGAL-30D 120V 120/208V 120/240V 240V	1620 1800 1920 1920	13.5 9.1 8.5 8.0	UGAHL-30D* 120V 120/208V 120/240V 240V	- 2370 2370 2370	- 11.8 10.4 9.9	30" ( 762 mm)	21 lbs. (10 kg)
UGAL-36D* 120V 120/240V 240V	2140 2180 2180	10.9 9.8 9.1	UGAHL-36D* 120/208V 120/240V 240V	2880 2780 2780	14.5 14.0 11.6	36" ( 914 mm)	24 lbs. (11 kg)
UGAL-42D*+ 120/208V circ 1 208V circ 2 120/208V 120/240V circ 1 240V circ 2 120/240V 240V circ 1 240V circ 2 240V	840 1020 900 1080 1200 1380	4.0 5.5 3.8 5.3 5.0 5.8	UGAHL-42D*+ 120/208V circ 1 208V circ 2 120/208V 120/240V circ 1 240V circ 2 120/240V 240V circ 1 240V circ 2 240V	1500 1680 1500 1680 1500 1680	7.2 8.7 6.3 7.8 6.3 7.0	42" (1067 mm)	27 lbs. (12 kg)
UGAL-48D*+ 120/208V circ 1 208V circ 2 120/208V 120/240V circ 1 240V circ 2 120/240V 240V circ 1 240V circ 2 240V	1470 1710 1500 1740 2000 1240	7.1 9.1 6.3 8.3 8.3 5.2	UGAHL-48D*+ 120/208V circ 1 208V circ 2 120/208V 120/240V circ 1 240V circ 2 120/240V 240V circ 1 240V circ 2 240V	2025 2265 1950 2190 2600 1540	9.7 11.7 8.1 10.1 10.8 6.4	48" (1219 mm)	30 lbs. (14 kg)
UGAL-54D*+ 120/208V circ 1 208V circ 2 120/208V 120/240V circ 1 240V circ 2 120-240V 240V circ 1 240V circ 2 240V	1470 1710 1500 1740 2000 1240	7.1 9.1 6.3 8.3 8.3 5.2	UGAHL-54D*+ 120/208V circ 1 208V circ 2 120/208V 120/240V circ 1 240V circ 2 120/240V 240V circ 1 240V circ 2 240V	2250 2490 2250 2490 3000 1740	10.8 12.8 9.4 11.4 12.5 7.3	54" (1372 mm)	33 lbs. (15 kg)
UGAL-60D*+ 120/208V circ 1 208V circ 2 120/208V 120/240V circ 1 240V circ 2 120/240V 240V circ 1 240V circ 2 240V	1960 2260 2000 2300 2000 2300	9.4 11.9 8.3 10.8 8.3 9.6	UGAHL-60D*+ 120/208V circ 1 208V circ 2 120/208V 120/240V circ 1 240V circ 2 120/240V 240V circ 1 240V circ 2 240V	2700 3000 2600 2900 2600 2900	13.0 15.5 10.8 13.3 10.8 12.1	60" (1524 mm)	37 lbs. (17 kg)
UGAL-66D*+ 120/208V circ 1 208V circ 2 120/208V 120/240V circ 1 240V circ 2 120/240V 240V circ 1 240V circ 2 240V	1960 2260 2000 2300 2000 2300	9.4 11.9 8.3 10.8 8.3 9.6	UGAHL-66D*+ 120/208V circ 1 208V circ 2 120/208V 120/240V circ 1 240V circ 2 120/240V 240V circ 1 240V circ 2 240V	2700 3000 2600 2900 2600 2900	13.0 15.5 10.8 13.3 10.8 12.1	66" (1676 mm)	40 lbs. (18 kg)
UGAL-72D*+ 120/208V circ 1 208V circ 2 120/208V 120/240V circ 1 240V circ 2 120/240V 240V circ 1 240V circ 2 240V	1960 2320 2000 2360 2000 2360	9.4 12.4 8.3 11.3 8.3 9.8	UGAHL-72D*+ 120/208V circ 1 208V circ 2 208V circ 3 120V 120/240V circ 1 240V circ 2 120/240V 240V circ 1 240V circ 2 240V	3000 3000 360 3360 3000 3360	14.4 14.4 3.0 15.5 12.5 15.5 12.5 14.0	72" (1829 mm)	44 lbs. (20 kg)

## MOUNTING REQUIREMENTS

Ultra-Glo Warmers must be mounted at least 1" (25 mm) below shelf.

Ultra-Glo Dual Standard Watt Warmers should be positioned 18" to 22" (457-559 mm) above a non-metallic surface.

Ultra-Glo Dual High Watt Warmers should be positioned 22" to 26" (559-660 mm) above a non-metallic surface.

- Non-Adjustable Tubular Stands – 14"-24" (356-610 mm)
- Incandescent Lights
- Halogen Bulbs in lieu of Standard Display Lights
- Extended Electrical Leads
- Remote Control Enclosure with Toggle Switch, Electronic Infinite Control, Relay, and Indicator Light (in lieu of attached control box)

The Ultra-Glo shall consist of an aluminum housing, ceramic heating element, and angle brackets for mounting. Remote Control Enclosure is recommended. Mounting heights between 18" to 22" (457-559 mm) dual standard watt and 22" to 26" (559-660 mm) dual high watt.

24/7 parts and service assistance (U.S. and Canada only).