

HOBART701 S Ridge Avenue, Troy, OH 45374
1-888-4HOBART • www.hobartcorp.com**HCH SERIES
COOK/HOLD OVENS****HOBART****STANDARD FEATURES**

- Heavy duty polished stainless steel cabinet with tubular steel inner frame for increased durability.
- Stainless steel door with heavy duty hinges and door latch mechanism, and long lasting silicone gaskets.
- Cabinet and door filled with 1½" thick fibrous insulation.
- Interior pan supports are removable for easy cleaning.
- Self-contained power head easily removable without tools. Includes metal sheathed heating elements, convection fan, electronic controls and "power on", "cooking" and "holding" cycle indicator lights. Electronic timer with digital display indicates how much cooking time remains before switching to the hold cycle. Solid state temperature controls can be set to operate automatically or manually. Cook temperature adjusts from 100° to 350°F. Holding temperature adjusts from 100° to 250°F.
- Set of four 5" casters, two locking.
- Requires 208 volt or 220/240 volt, 60 Hz, 1 phase power supply. Furnished with 6' power cord. Plug changes for each unit.

OPTIONS AT EXTRA COST

- Stacking kit.
- 3 phase power.
- Two year extended limited parts and labor warranty.
- Extra set of universal pan supports.

MODELS

- HCH5** Five level cook and hold oven accepts five 18" x 26" x 1" baking pans or ten 12" x 20" x 2½" hotel steam pans.
- HCH8** Eight level cook and hold oven accepts eight 18" x 26" x 1" baking pans or sixteen 12" x 20" x 2½" hotel steam pans.
- HCH16** Sixteen level cook and hold oven accepts sixteen 18" x 26" x 1" baking pans or thirty-two 12" x 20" x 2½" hotel steam pans.
- HCH88** Sixteen level cook and hold oven accepts sixteen 18" x 26" x 1" baking pans or thirty-two 12" x 20" x 2½" hotel steam pans.

Details and Dimensions on Reverse Side.


**HCH SERIES COOK/HOLD OVENS**

HCH SERIES COOK/HOLD OVENS




701 S Ridge Avenue, Troy, OH 45374
1-888-4HOBART • www.hobartcorp.com


DETAILS AND DIMENSIONS:

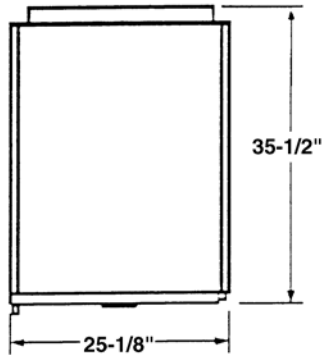


TOP VIEW

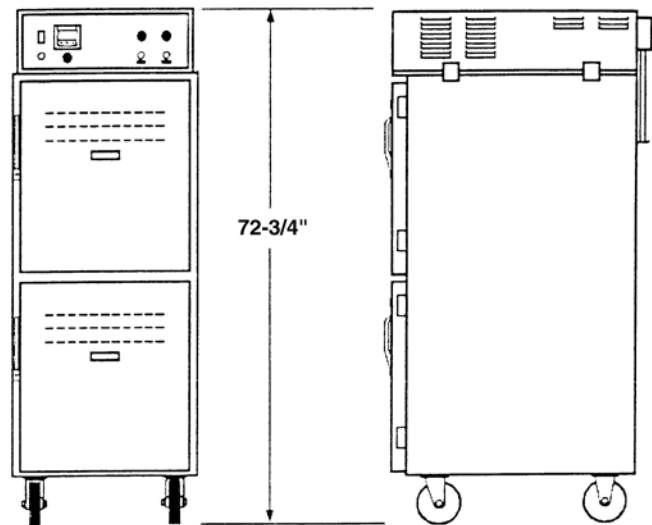


HCH16

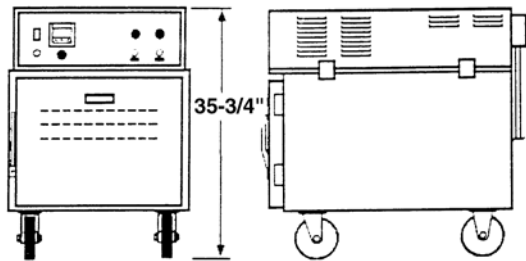

HCH5

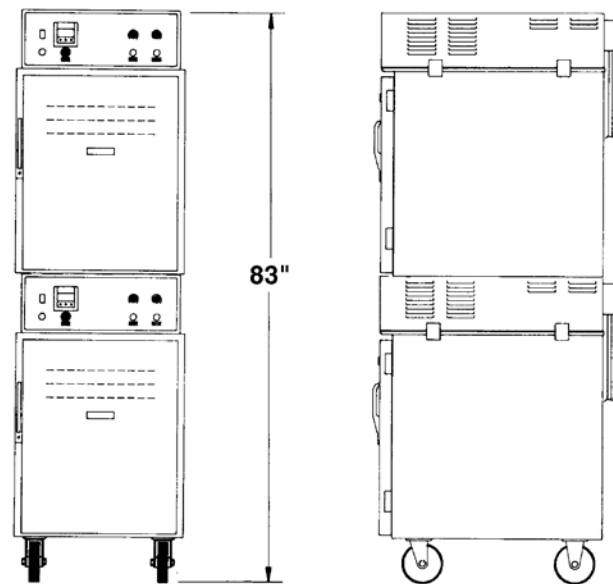

HCH88

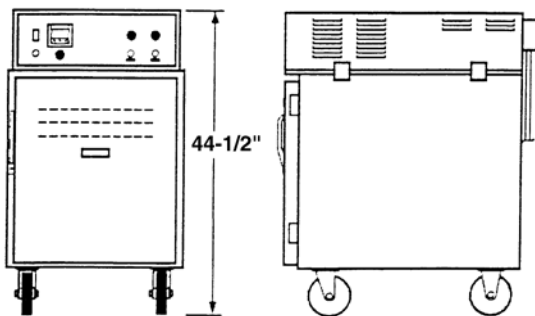

HCH8

Model No.	Capacity 18 x 26 or 12 x 20	Capacity (lbs.)	Body Dimensions						Electrical Specifications			Ship. Wt. (approx.)
			W/Perimeter Bumper System			W/O Perimeter Bumper System			Volts	Watts	Amps	
			Height	Depth	Width	Height	Depth	Width				
HCH5	5 or 10	80	35 ³ / ₄ "	36 ³ / ₄ "	30 ¹ / ₈ "	35 ³ / ₄ "	35 ¹ / ₂ "	25 ⁵ / ₈ "	240 208	2830 2160	11.8 10.4	225 lbs.
HCH8	8 or 16	120	44 ¹ / ₂ "	36 ³ / ₄ "	30 ¹ / ₈ "	44 ¹ / ₂ "	35 ¹ / ₂ "	25 ⁵ / ₈ "	240 208	5450 4140	22.7 19.9	285 lbs.
HCH16	16 or 32	240	72 ³ / ₄ "	36 ³ / ₄ "	30 ¹ / ₈ "	72 ³ / ₄ "	35 ¹ / ₂ "	25 ⁵ / ₈ "	240 208	8140 6180	33.9 29.7	400 lbs.
HCH88	16 or 32	240	83"	36 ³ / ₄ "	30 ¹ / ₈ "	83"	35 ¹ / ₂ "	25 ⁵ / ₈ "	240 208	10000 8280	45.4 39.8	550 lbs.

As continued product improvement is a policy of Hobart, specifications are subject to change without notice.