

CK91 - Freestanding**LARGE 60 LB. Capacity Fryer
with Internal Power Turnoff.**

- **Heating elements designed with pyrolytic cleaning** — Reduces cleaning and improves sanitation.
- **Quad Guard Protection** — Provides back-up to primary and high limit temperature thermostats.
- **Power Turnoff** — Disconnects power supply to fryer if ventilation hood fire extinguishing system is activated.
- **Stainless steel, tubular heating elements** — Reduces repair costs and downtime.
- **Fast recovery** — Minimizes low oil temperatures and time; improves food quality and consistency while increasing production.
- **Heating element cycle light** — Indicates if elements are heating or if fryer has reached preset temperatures.
- **High Density Insulation** — Located on sides and bottom of fry kettle; reduces heat loss and increases efficiency.
- **Heating element guard** — Prevents free-floating products from contacting heating elements.
- **Stainless steel front, top and fry kettle** — Durable. Reduces cleaning time and improves sanitation.

- **Removable Crumb Basket** — Cold zone accumulates crumbs in removable mesh basket. Eases cleaning. Increases oil life thru reduced carbonization.

SPECIFICATIONS: Listed by Underwriters Laboratories Inc and by National Sanitation Foundation.

GENERAL: Freestanding electric fry kettle best suited for free-floating foods such as fish and chicken.

CONSTRUCTION: Front, top and shortening container are stainless steel. Sides and back are permalucent gray. Optional stainless steel sides, back and legs. Three-section front panels removable for servicing. Enclosed tubular stainless steel heating units which swing up and burn clean in raised position and encircle the sides of the shortening container. Heating element guard keeps food from contacting heating elements in free-floating frying.

Storage cabinet with door and mounts on accessory 6" adjustable legs. Cooking oil drains thru center well opening. Drainage controlled by hand-operated quick opening valve behind cabinet door.

CONTROLS: Rocker switch on front panel turns "power on" activating signal light located on heating unit support head. Factory-installed internal Power Turnoff. Temperature range is 200-400°F.

CAPACITY: 60 lbs. of oil of a type recommended for use in commercial fryer in integral cooking well. Hourly outputs up to 80 lbs. raw-to-done French fried potatoes (106 lbs. of blanched potatoes) or 90 lbs. of fried chicken.

ELECTRICAL: 16.8 KW. Wired for 3 phase power supply. Supplied with QUAD GUARD protection which features two contactors and two thermostats to provide reliable interruption of power to heating elements and prevents overheating. Temperature-limiting thermostat has manual reset button on front panel. Extra fuses protect thermostat circuit.

Anti-splash protection with counter balancing, force-actuated mechanism in heating unit support head. Standard internal Power Turnoff automatically shuts off power to fryer which is located under and connected to a vent, if fire extinguishing system is activated.

ACCESSORIES:**BASKETS**


- Single twin basket
- Large basket w/1/4" mesh for free-floating fish & chip fry

LEGS, CASTERS, STANDS, BASES

- Set of four 6" adjustable s/s tubular legs
- 3B mobile caster kit (requires CX139 base)
- Adapter base — 2" H x 24" W x 36" D
- Set of four 6" H. casters, front swivel with brakes, rear fixed.

SPACERS

- 6" H. spacer
- 12" H. spacer
- 18" H. spacer
- 17.5" spacer available in 0.12 in. increments between 4" and 24"

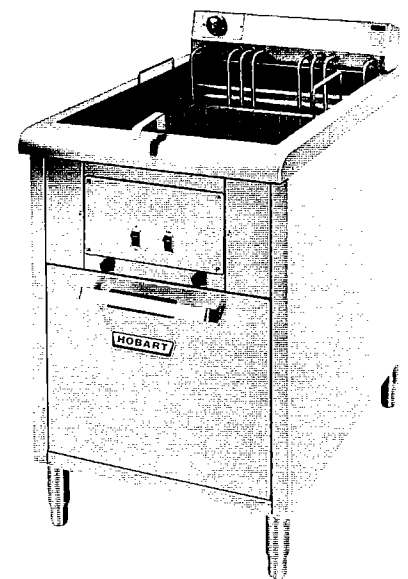**CK91**

CK91 FRYERS



OTHER

- Non-standard spreader plate in 0.12" increments between 4" and 24"
- S/S fat cover
- Banking strips
- 24" backshelf
- Siphon

Step down transformer from a 480-volt, 240-volt supply source to a 120-volt power for the control circuit of fryers where a four-wire supply source or separate 120-volt power are not available.

WEIGHT:	Shipping	Net
CK91	250	215

As continued product improvement is a policy of Hobart, specifications are subject to change without notice.

DETAILS AND DIMENSIONS

GENERAL & DIMENSIONAL DATA

MODEL	SHORT CAP'Y.	OVERALL EXTERNAL DIMENSIONS			HEIGHT WITH HEATING UNIT RAISED (NO LEGS)	USABLE SHORT, CONTAINER DIMENSIONS (LESS HEAT ELEMENTS)		
		WIDTH	DEPTH FRONT TO BACK	HEIGHT INCL. HEAT. UNIT SUPPORT LESS LEGS		INSIDE WIDTH	INSIDE FRONT TO BACK (LESS FRONT & REAR FOAM VOL.)	INSIDE HEIGHT (LESS FOAM HT.)
		LBS.	IN.	IN.		IN.	IN.	IN.
CK91	60	24	38	35	54	18½	19½	4½

FRYING GUIDE (WITH BASKETS)

TYPE OF FOOD	BASKET LOAD (LBS.)	ACTUAL COOKING TIME/LOAD (MIN.)	COOKING TEMP. (°F)
French fried potatoes (raw to done), ½" cut	8.0	6	375
Fresh mixed chicken parts (raw to done)	8.9	6	350

ELECTRICAL DATA

MODEL	TOTAL KW	WATTS TO HOLD 350F	3-PHASE LOADING			NOMINAL AMPS		
			KW PER PHASE			3-PHASE		
			L1-L2	L2-L3	L1-L3	208 VOLTS	240 VOLTS	480 VOLTS
CK91	16.8	1300	5.3	5.3	6.2	47.9	41.5	20.7


Rated Voltages: 120/208, 120/240 or 480 VAC, 3-Phase, 60 HZ.

NOTE: 208-volt and 240-volt fryers are factory wired for connection to a four-wire power supply which also provides 120-volt supply that is necessary for the control circuit. Circuit flexibility allows installation to a three-wire power supply when a separate 120-volt supply is provided.


480-volt fryers are wired for connection to a three-wire, 480-volt power supply. In addition, a separate 120-volt power supply is required.

208, 240 or 480-volt AC connections can also be made single or to one phase of a three-phase 60 HZ system. In addition, a separate 120-volt power supply is required.


Regardless of fryer voltage or power supply, all fryers can be connected to a hood fire-extinguishing system.

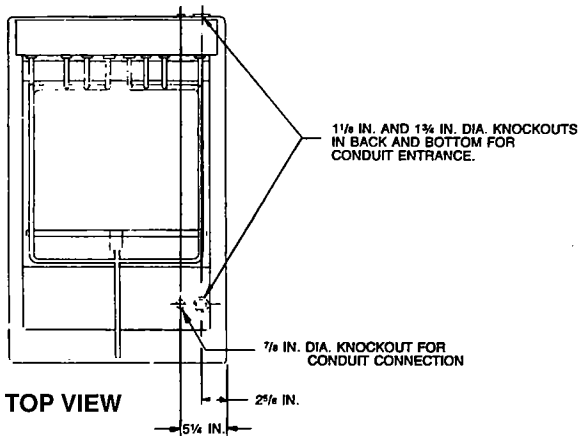

TOP VIEW

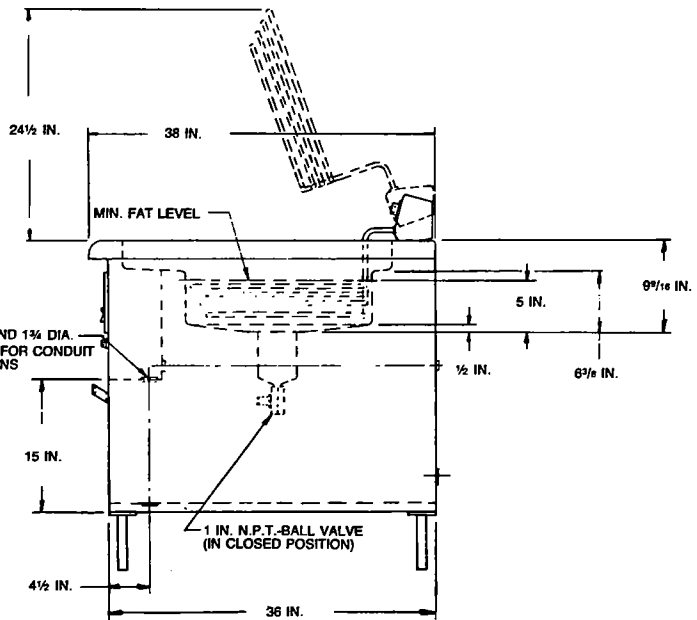

SIDE VIEW

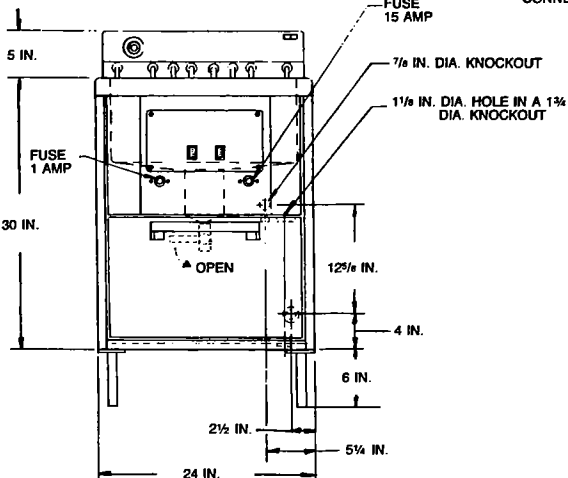

FRONT VIEW



EXECUTIVE OFFICES
TROY, OHIO 45374