

CONTINENTAL BAKERY CR

ITEM: _____ QUANTITY: _____

MODEL # SCCB-CR

SCCB-CR - Shown with standard features.

SPECIFICATIONS

The SCCB-CR is a two compartment Bakery display case consisting of a refrigerated top section and a refrigerated self-service bottom section. Available with a choice of standard grade plastic laminate exterior ends. The lower section has S/S deck pans and a raised fitted hemmed edge to contain spills. Deck pan can be removed for easy cleaning.



Available depths: 35 3/4"

Available lengths: 36" 48" 60" 72"

STANDARD FEATURES

Upper Section

- Top Canopy Light
- 2 Tempered Glass Shelves
- White Laminated Deck
- Insulated Sliding Rear Doors
- Mirrored Interior Ends
- Refrigerated Operator Service

Bottom Section

- Top Canopy Light
- Stainless Steel Deck
- Perforated Back Panel
- Refrigerated Self Service
- Standard Grade Laminate
- 115/60/Single Phase
- UL Listed in Accordance with NSF 7
- Built-In Condensate Evaporator
- 134A Refrigerant
- Black Base
- Thermometer

OPTIONAL FEATURES

- Stainless Steel Exterior Finish
- Special Laminates
- Wood Veneers (Unfinished)
- Wood Veneers (Stained & Sealed)
- Miscellaneous Trim
- Promolux Lighting (Low UV)
- Casters
- Powder Coated Interior Back Panel and Hardware:
 - Black White
- Mirrored Polished Stainless Steel Interior Ends
- Rear Loading Doors on Bottom Section
- Rear Door Locks
- Rear Fold Down Work Ledge
- Energy Night Curtain for Bottom Section
- Removable Locking Night Cover for Bottom Section
- 5 Year Compressor Warranty

WHEN ORDERING, PLEASE SPECIFY:

APPLICATION: _____



REFRIGERATION TYPE: _____

LAMINATE COLOR: _____

CONTINENTAL BAKERY CR

TOLL FREE: 800-525-3692

MODEL # SCCB-CR

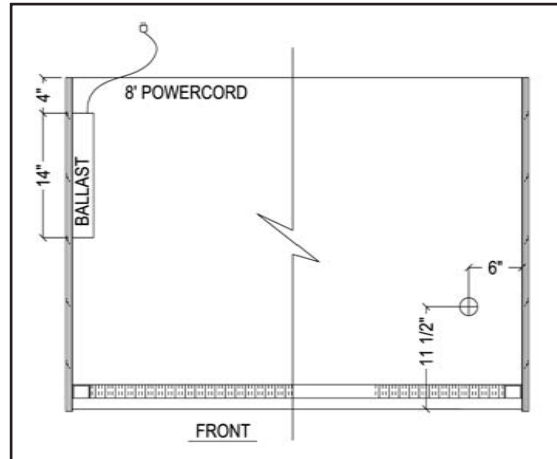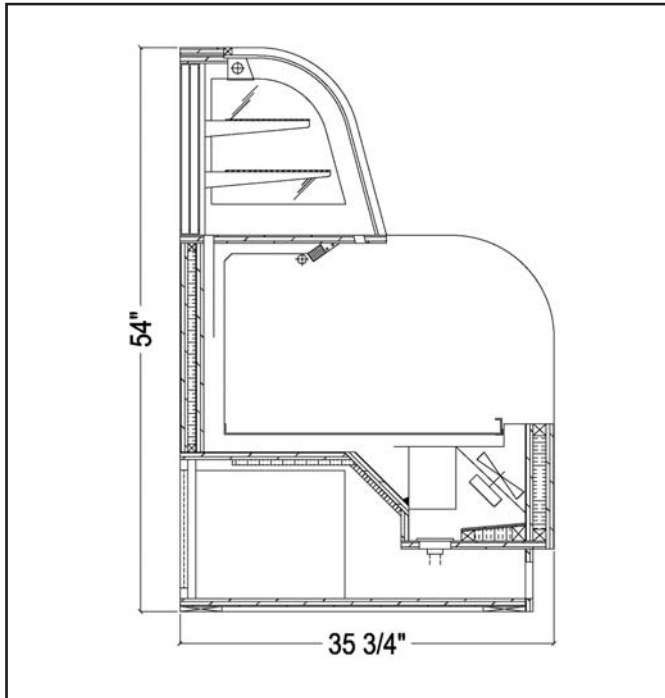

Electrical & Plumbing locations



Refrigerated Case Display 67C9 Listed
Also classified by Underwriters Laboratories Inc.
In Accordance with ANSI/NSF 7-1999 and ANSI/NSF 2-1999

MODEL	L	D	H	COMP HP	VOLT	AMP	NEMA PLUG	WT
SCCB36R-CR	36	35 3/4	54	1/2	(2) 115V	10.4/8.3	(2) 5-15P	650
SCCB48R-CR	48	35 3/4	54	1/2	(2) 115V	12.1/8.3	5-20P/5-15P	800
SCCB60R-CR	60	35 3/4	54	3/4	115/208-230	15	L 14-20P	925
SCCB72R-CR	72	35 3/4	54	3/4	115/208-230	15.2	L 14-20P	1100

The SCCB-CR is designed for use in stores where temperature and humidity do not exceed 75 degrees F and 55% R. H. Locate away from direct sunlight, rapid air currents and extreme temperature changes. Exposure to air currents from ceiling fans, air conditioners, ovens, etc. will disrupt the case's air curtain and refrigerated zone within. Any adverse conditions will affect warranty. RPI in line with its policy to continually improve its product reserves the right to change materials and specifications without notice.

CALL TOLL FREE: 800-525-3692 (609-714-2330)

FAX: 609-714-2331 www.regalpinnacle.com

220 ROUTE 70, MEDFORD, NJ 08055

RPI REGAL PINNACLE INTEGRATIONS INDUSTRIES, INC.