

# DOUBLÉ BAKERY

ITEM: \_\_\_\_\_ QUANTITY: \_\_\_\_\_

## MODEL # SCDB

SCDB - Shown with wire shelves and horizontal laminate inlay.

### SPECIFICATIONS

The SCDB is a Bakery display case with a choice of standard grade plastic laminate exterior ends and fixed curved insulated front glass.



Available depths:  30"  35 3/4"

Available lengths:  36"  48"  60"  72"  96"

### STANDARD FEATURES

- Standard Grade Laminate Exterior
- Top Canopy Light
- 3 Tempered Glass Shelves with Lights
- White Laminated Deck
- Mirrored Interior Ends
- Mirrored Rear Sliding Doors
- 115V/60/Single Phase
- UL Listed in Accordance with NSF 7
- Built-In Condensate Evaporator
- 134A Refrigerant
- Black Base
- Thermometer

### OPTIONAL FEATURES

- Stainless Steel Exterior Finish
- Special Laminates
- Wood Veneers (Unfinished)
- Wood Veneers (Stained & Sealed)
- Miscellaneous Trim
- Promolux Lighting (Low UV)
- Brass Trim and Hardware
- Wire Shelves
  - Brass  White  Black  Chrome
- Casters
- Bullet Feet
- Rear Fold Down Work Ledge
- Rear Door Locks
- 5 Year Compressor Warranty
- Remote Refrigeration

### WHEN ORDERING, PLEASE SPECIFY:

APPLICATION: \_\_\_\_\_



REFRIGERATION TYPE: \_\_\_\_\_

LAMINATE COLOR: \_\_\_\_\_

# DOUBLE BAKERY

TOLL FREE: 800-525-3692

## MODEL # SCDB

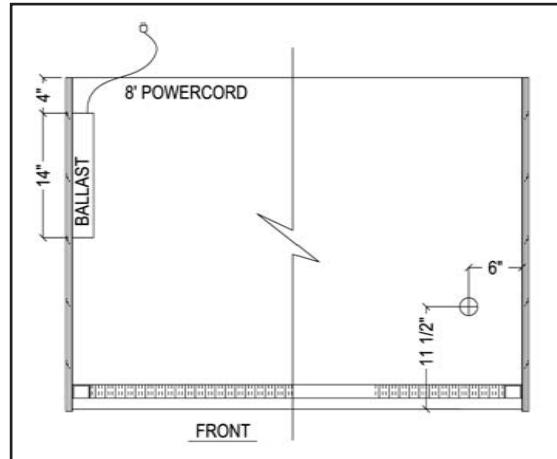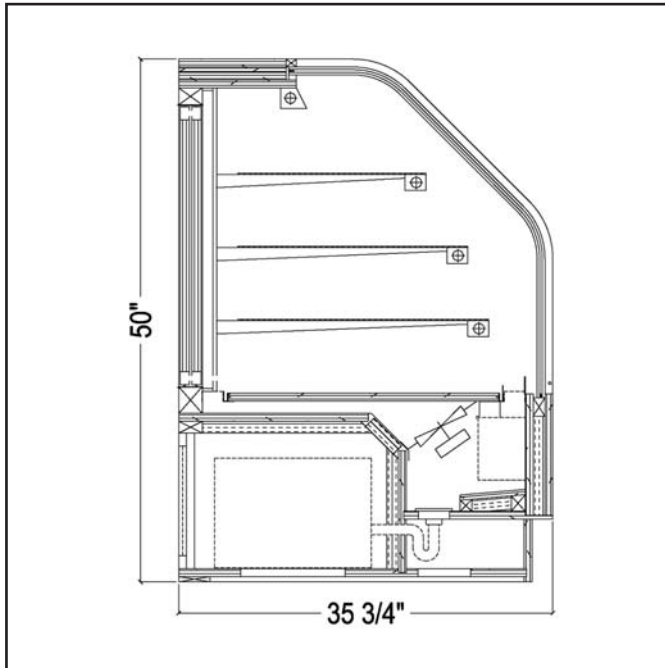

### Electrical & Plumbing locations



Refrigerated Case Display 67C9 Listed  
Also classified by Underwriters Laboratories Inc.  
In Accordance with ANSI/NSF 7-1999 and ANSI/NSF 2-1999

MODEL	L	D	H	COMP HP	VOLT	AMP	NEMA PLUG	WT
SCDB36R	36	30-35 3/4	50	1/4	115V	7.2	5-15P	525
SCDB48R	48	30-35 3/4	50	1/3	115V	9.6	5-15P	675
SCDB60R	60	30-35 3/4	50	1/3	115V	9.6	5-15P	800
SCDB72R	72	30-35 3/4	50	1/2	115V	12.6	5-20P	1000
SCDB96R	96	30-35 3/4	50	1/2	115V	13.7	5-20P	1100
SCDB36D	36	30-35 3/4	50		115V	1.2	5-15P	325
SCDB48D	48	30-35 3/4	50		115V	1.2	5-15P	450
SCDB60D	60	30-35 3/4	50		115V	1.2	5-15P	550
SCDB72D	72	30-35 3/4	50		115V	1.8	5-15P	700
SCDB96D	96	30-35 3/4	50		115V	2.2	5-15P	900

The SCDB merchandiser is designed for use in stores where temperature and humidity do not exceed 75 degrees F and 55% R. H. Locate away from direct sunlight, rapid air currents and extreme temperature changes. Any adverse conditions will affect warranty.

RPI in line with its policy to continually improve its product reserves the right to change materials and specifications without notice.

CALL TOLL FREE: 800-525-3692 (609-714-2330)

FAX: 609-714-2331 [www.regalpinnacl.com](http://www.regalpinnacl.com)

220 ROUTE 70, MEDFORD, NJ 08055

**RPI** REGAL PINNACLE INTEGRATIONS INDUSTRIES, INC.