VULCAN

VBP77I HOLDING & TRANSPORT CABINET

Item #



Model VBP77I







UL listed. UL listed to Canadian safety standards.
Classified by UL to NSF Std. #4.

SPECIFICATIONS

Vulcan Hart Model No. VBP77I heated holding and transport cabinet features 2 separately controlled compartments in 2 separate cabinets, one stacked on top of the other. Complete with full perimeter bumper and 5" heavy duty casters (2 swivel with brakes and 2 rigid). Each compartment has a recessed control panel containing dual indicator light, thermometer, and full range thermostat for temperatures up to 190°F (88°C). Individual compartment capacity is 7 each 18" x 26" sheet pans, 14 each 12" x 20" x 21/2" steam table pans, or a combination of both on 3" centers. Each compartment comes with 5 pairs of universal tray slides adjustable on 11/2" centers. Cabinet interior and exterior are both constructed out of 20 gauge stainless steel. Recessed side-mounted lift handles, magnetic action door latch, and full insulation; 11/2" in side walls and 2" in top. Welded tubular steel frame for maximum strength. Complete with 2 cords and 2 plugs: NEMA 5-15 for 120 volts and NEMA 6-15 for 208-240 volts. 120 volts, 1,000 watts, 8.3 amps per compartment. Lifetime warranty on heating elements.

Exterior Dimensions:

243/4" W x 313/4" D x 733/4" H

☐ VBP77I Holding & Transport Cabinet

STANDARD FEATURES

- Holding and Transport Cabinet with two (2) compartments. Each compartment is a separate cabinet with one stacked on top of the other. Capacity per cabinet:
 - 7 each 18" x 26" sheet pans
 - 14 each 12" x 20" x 2½" pans or a combination of both on 3" centers
- 5" heavy duty casters (2 with swivel with brakes and 2 rigid)
- Recessed side mounted push/pull handles
- Two (2) recessed control panels
- Two (2) dual indicator lights
- Two (2) thermometers
- Two (2) full range thermostats for temperatures up to 190°F (88°C)
- Five pairs of universal tray slides adjustable on 1½" centers
- Interior and the exterior are both constructed out of 20 gauge stainless steel
- Fully insulated with 1½" in side walls and 2" in top
- Welded tubular steel frame for maximum strength
- Magnetic action door latch
- Complete with 2 cords and 2 plugs: NEMA 5-15 for 120 volts and NEMA 6-15 for 208-240 volts
- 120 volt, 1,000 watts, 8.3 amps per compartment
- Lifetime warranty on the heating elements

OPTIONS

- ☐ 208 / 240 volt
- ☐ Additional universal tray slides
- ☐ Humidity pan
- ☐ Full perimeter bumper
- ☐ Cord wrap
- ☐ Glass doors




a division of ITW Food Equipment Group LL

P.O. Box 696 Louisville, KY 40201 Toll-free: 1-800-814-2028 Local: 502-778-2791 Quote & Order Fax: 1-800-444-0602



VBP77I **HOLDING & TRANSPORT CABINET**

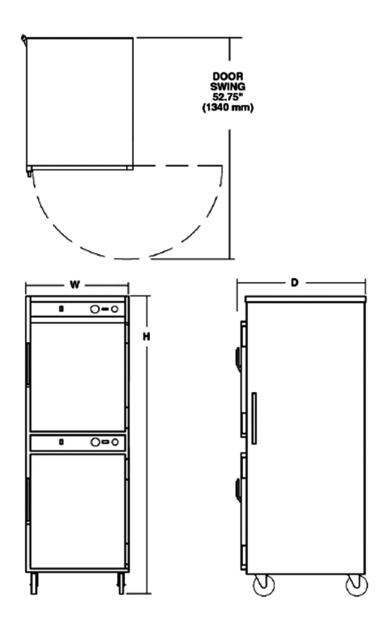

CAPACITY (per compartment)		DIMENSIONS	ELECTRICAL (per compartment)			SHIPPING WEIGHTS
PANS 12" x 20" x 2½"	SHEET PANS 18" x 26"	EXTERIOR	VOLTS	WATTS	AMPS	LBS / KG
14	7	24 ³ / ₄ " W x 31 ³ / ₄ " D x 73 ³ / ₄ " H	120	1,000	8.3	342 lbs. / 155 kg.



a division of ITW Food Equipment Group LLC

P.O. Box 696 Louisville, KY 40201 Toll-free: 1-800-814-2028 Local: 502-778-2791 Quote & Order Fax: 1-800-444-0602

