

## MODEL 1220-7-BC

### Holding & Transport Cabinets



Model 1220-7-BC



UL Listed to Canadian safety standards  
Classified by UL to NSF Std. #4

## Specifications

Wittco Model 1220-7-BC heated holding and transport cabinets with a narrow footprint designed specifically to hold 7 each 12 "x20 "x2½" pans on fixed racking. Blower motor for gentle and even temperature distribution. A full perimeter bumper and 5 " heavy duty casters ( 2 swivel with brakes and 2 rigid ) are standard. Recessed control panel containing dual indicator light, thermometer, and full range thermostat for temperatures up to 190°F ( 88°C ). Cabinet interior and exterior are both constructed out of 20 gauge stainless steel. Recessed side-mounted lift handles, magnetic action door latch, and full insulation; 1½ " in side walls and 2 " in top. Integrated steel frame for maximum strength. Lifetime warranty on heating elements. Complete with top mounted cord, cord wrap, and plug: NEMA 5-15 for 120 volts and NEMA 6-15 for 208-240 volts. 120 volts, 600 watts, 5 amps.

## Standard Features




- Holding and Transport Capacity  
Narrow footprint designed specifically to hold 7 each 12 "x20 "x2½" pans on fixed racking
- Blower motor for gentle and even temperature distribution
- A full perimeter bumper and 5 " heavy duty casters ( 2 swivel with brakes and 2 rigid ) Recessed side mounted lift handles
- Recessed control panel
- Dual indicator lights
- Thermometer
- Full range thermostat for temperatures up to 190°F ( 88°C )
- Interior and exterior are both constructed out of 20 gauge stainless steel
- Fully insulated with 1½ " in side walls and 2 " in top
- Integrated steel frame for maximum strength
- Magnetic action door latches
- Lifetime warranty on heating elements
- Top mounted cord
- Cord Wrap
- Complete with cord and plug: NEMA 5-15 for 120 volts and NEMA 6-15 for 208-240 volts
- 120 volts, 600 watts, 5 amps

## Options

- 208/240 volts
- Left hand hinged door
- Humidity pan

Approved by: \_\_\_\_\_

Date: \_\_\_\_\_

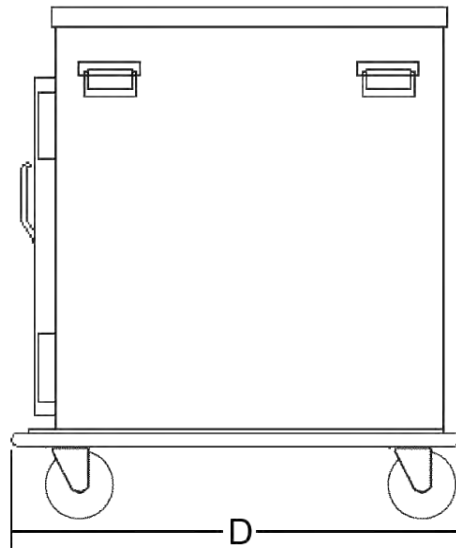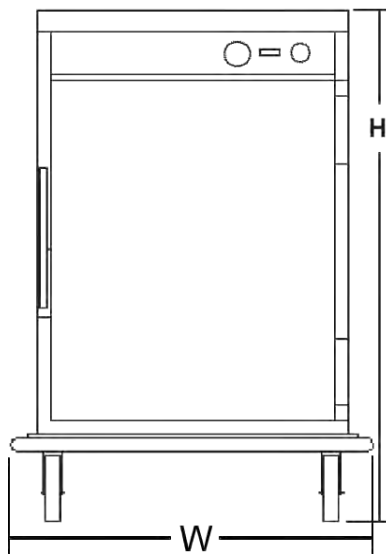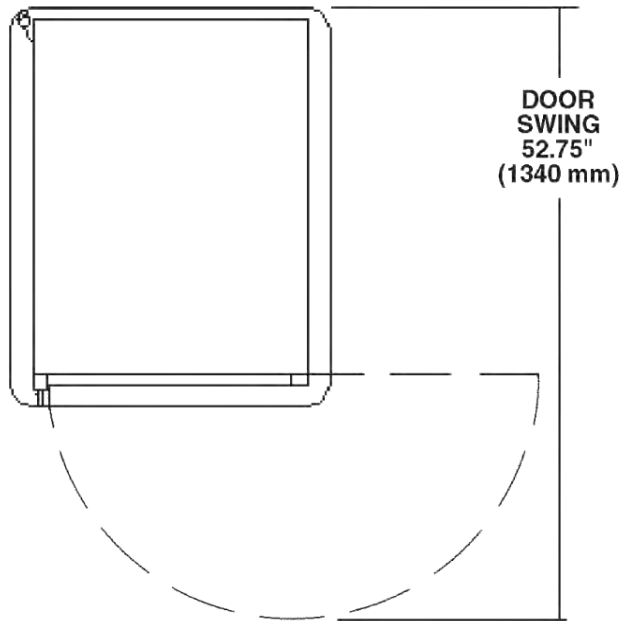

Model No	Capacity 12 "x20 "x2½ "	High	Wide	Deep	Shipping Weight	Volts	Watts	Amps
1220-7-BC	7	36.75 " 933mm	21 " 533mm	26.75 " 679mm	140# 64kg	120	600	5

Note: In line with its policy to continually improve its products, Wittco Foodservice Equipment reserves the right to change materials and specifications without notice.

Wittco Foodservice Equipment 7737 N 81st Street Milwaukee, WI 53223 USA

414-354-3080 800-367-8413 FAX 414-354-2821